

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_01.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



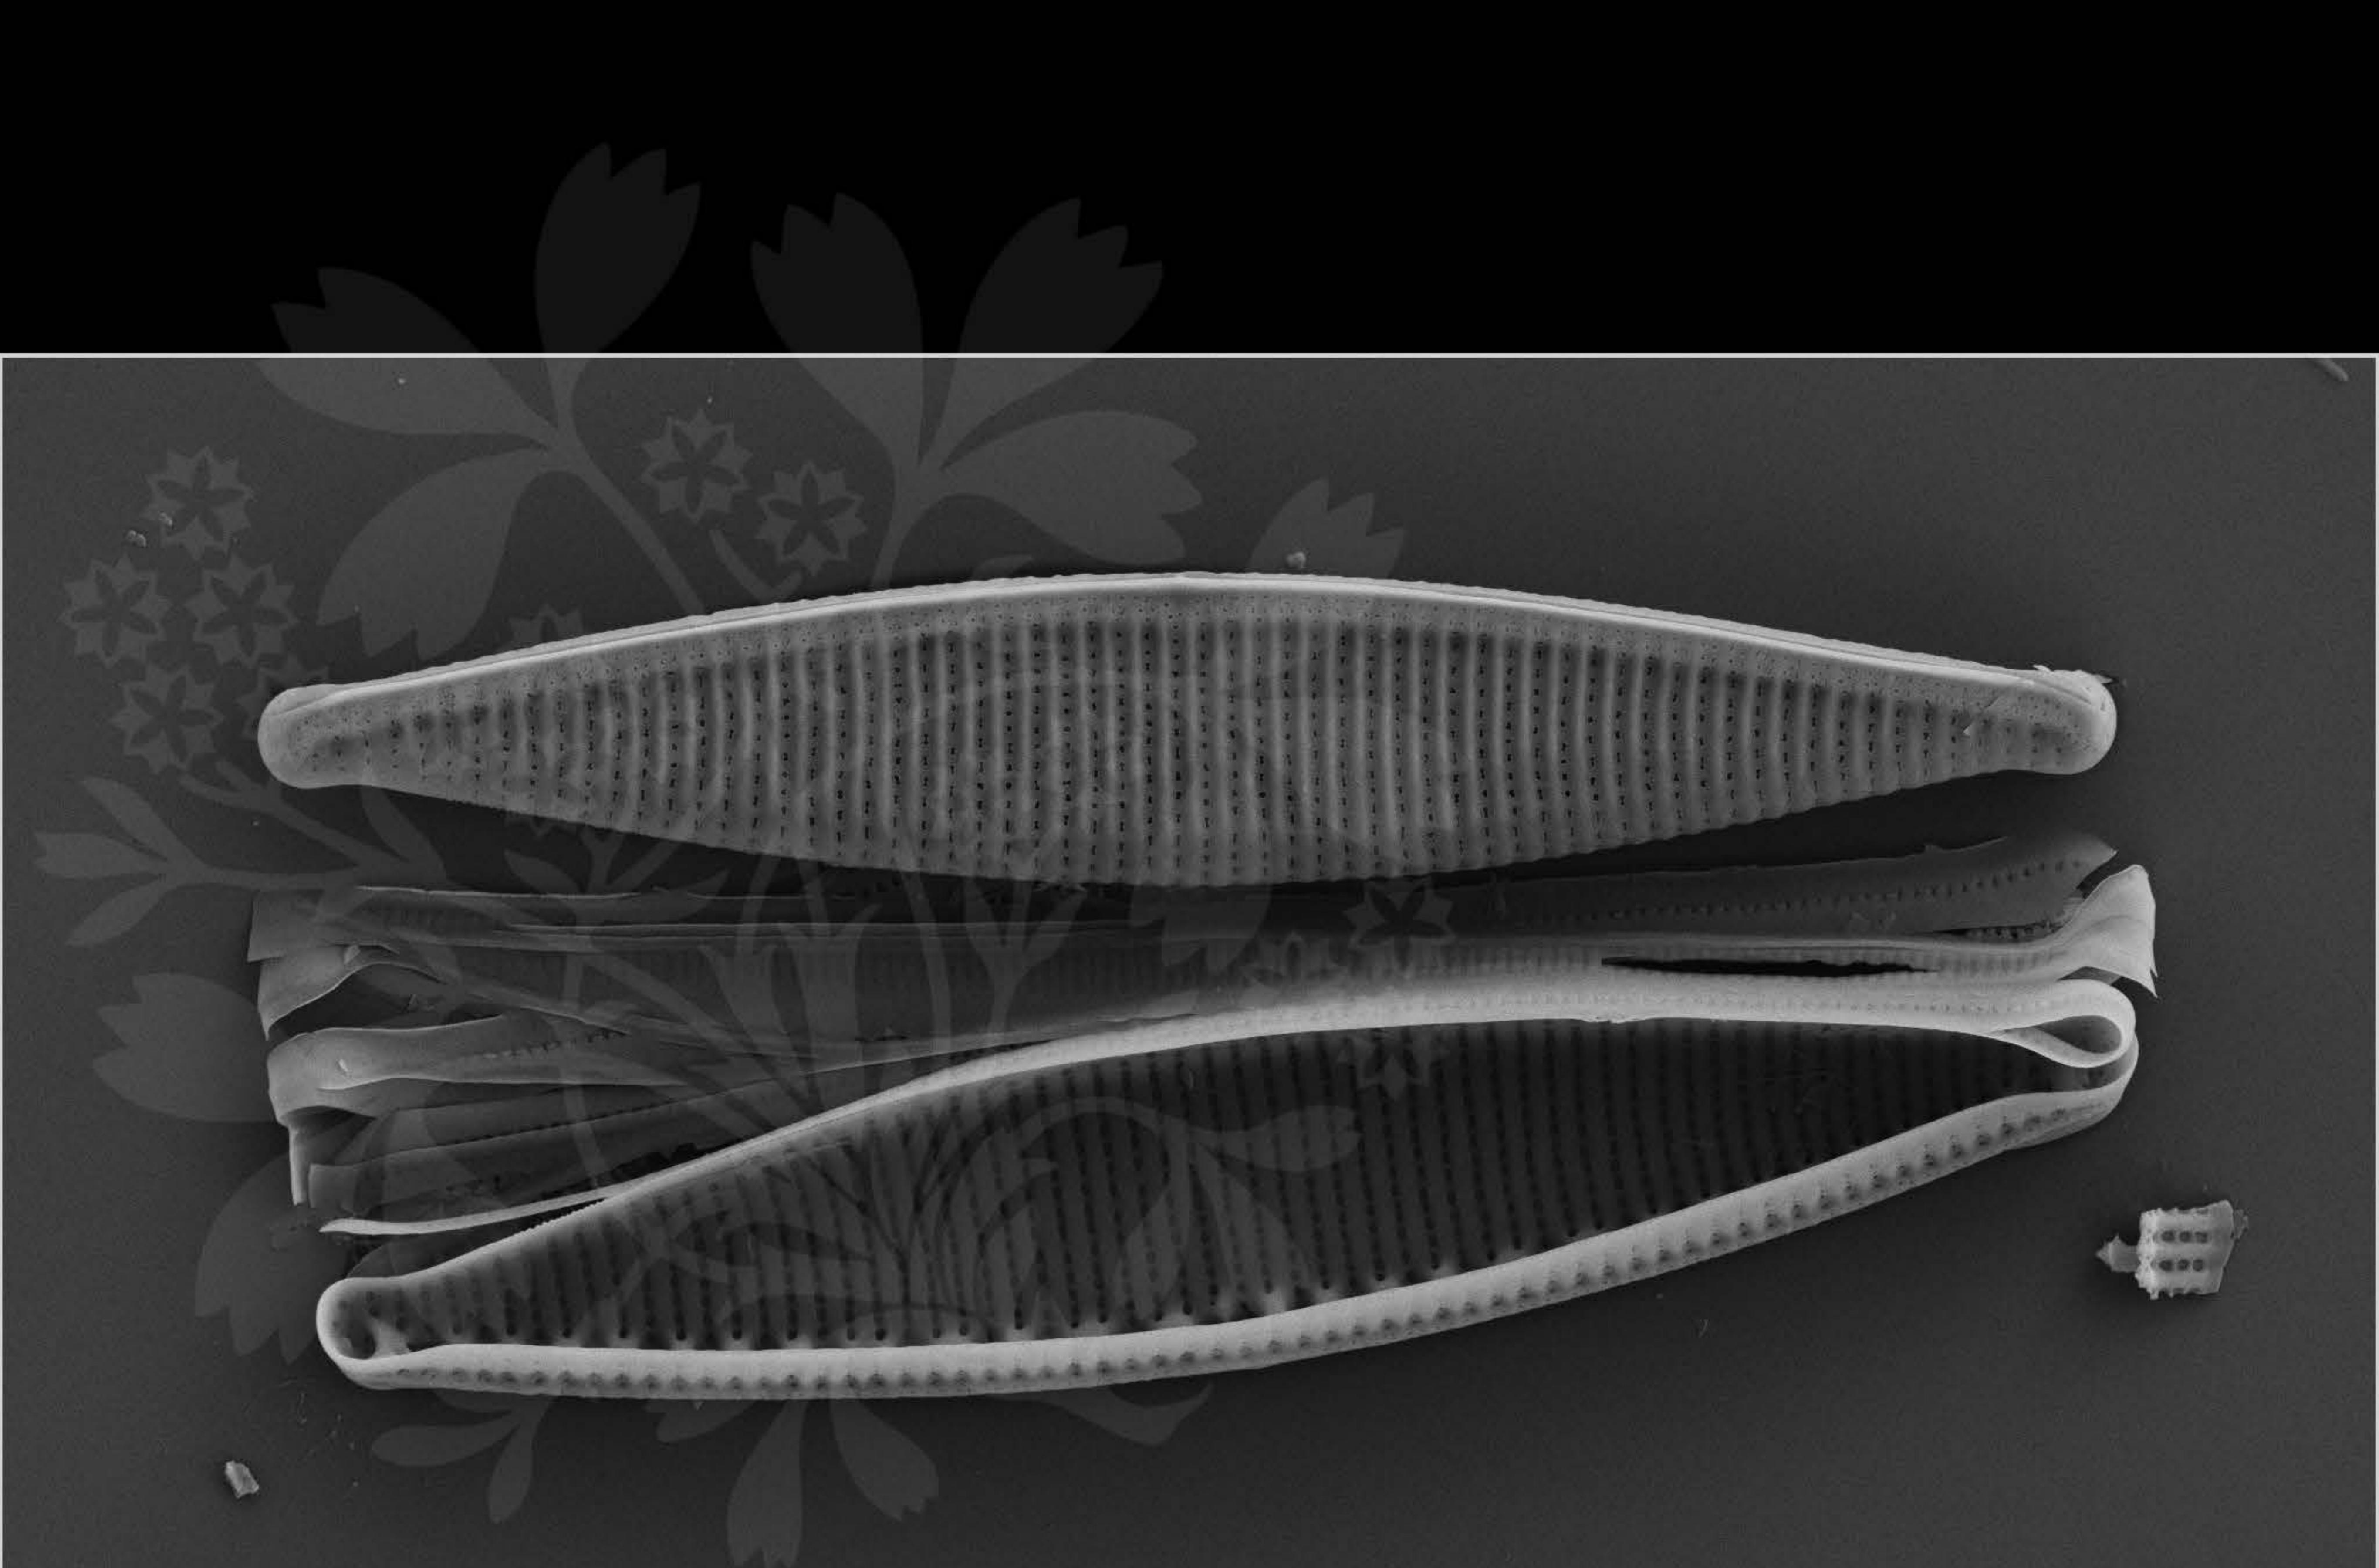

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_02.tif

Store resolution = 2048 * 1536 N = 6
Noise Reduction = Line Avg Scan Speed = 8



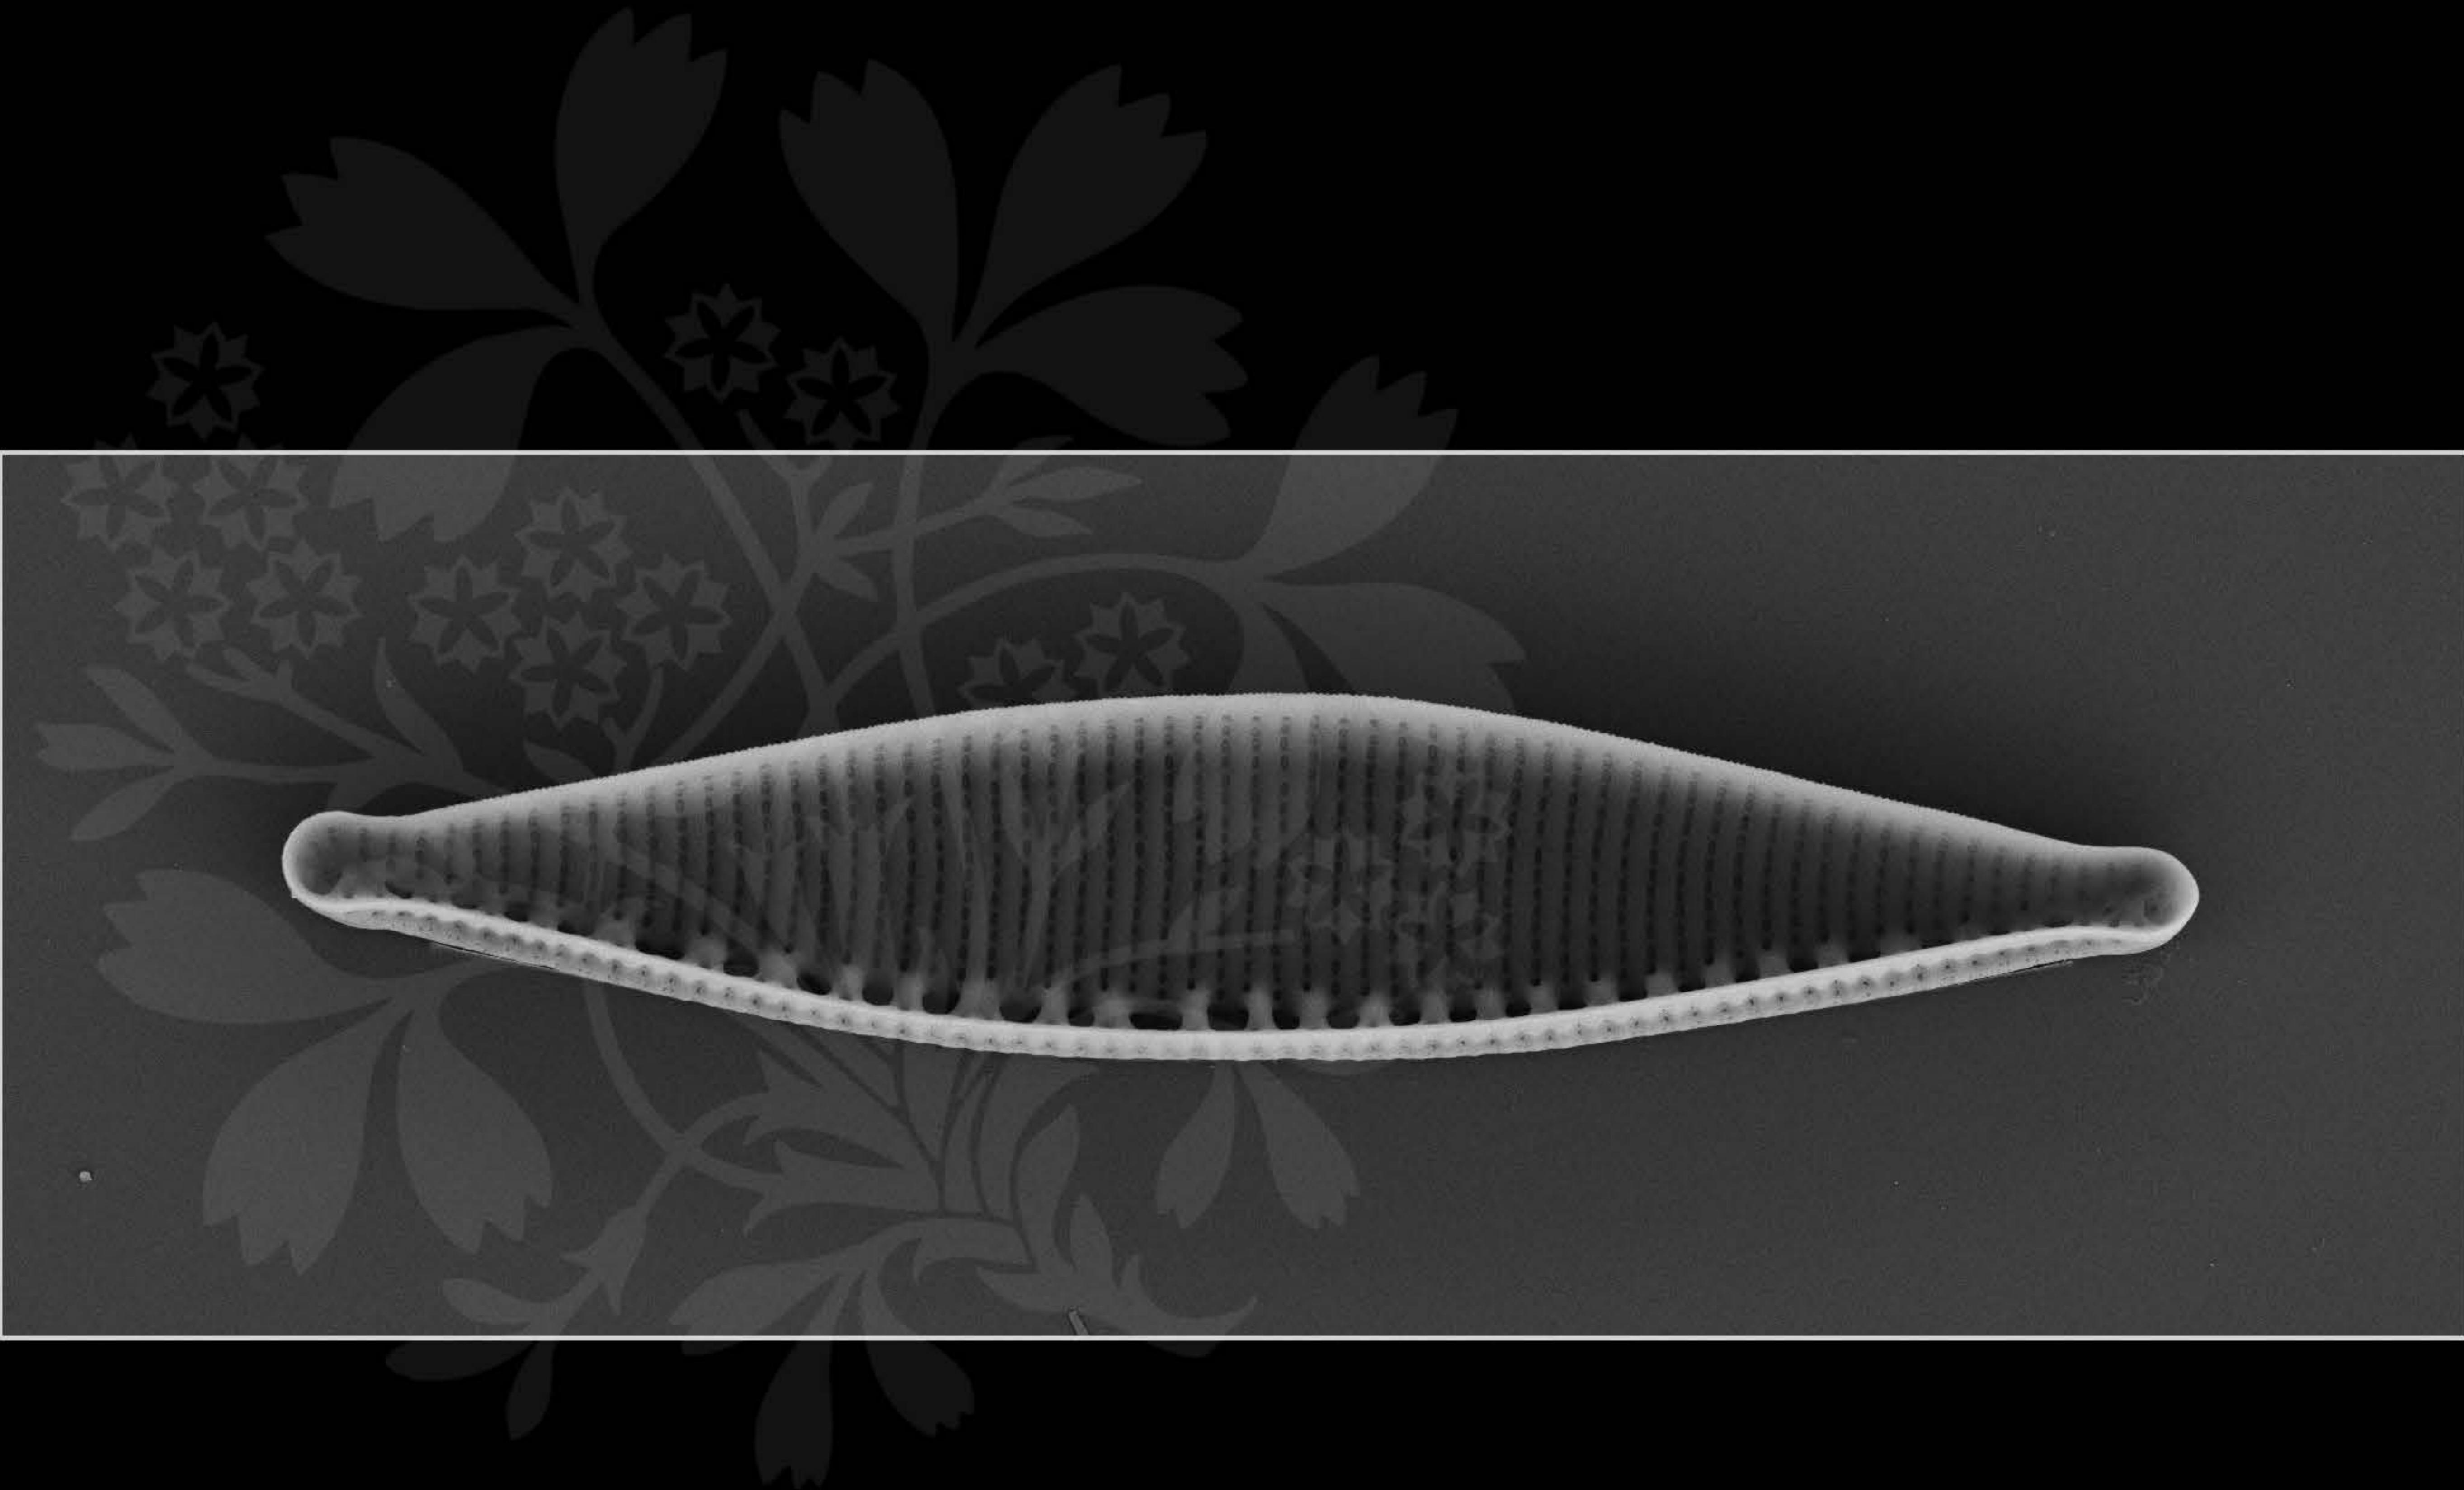

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_03.tif

Store resolution = 2048 * 1536 N = 6
Noise Reduction = Line Avg Scan Speed = 8



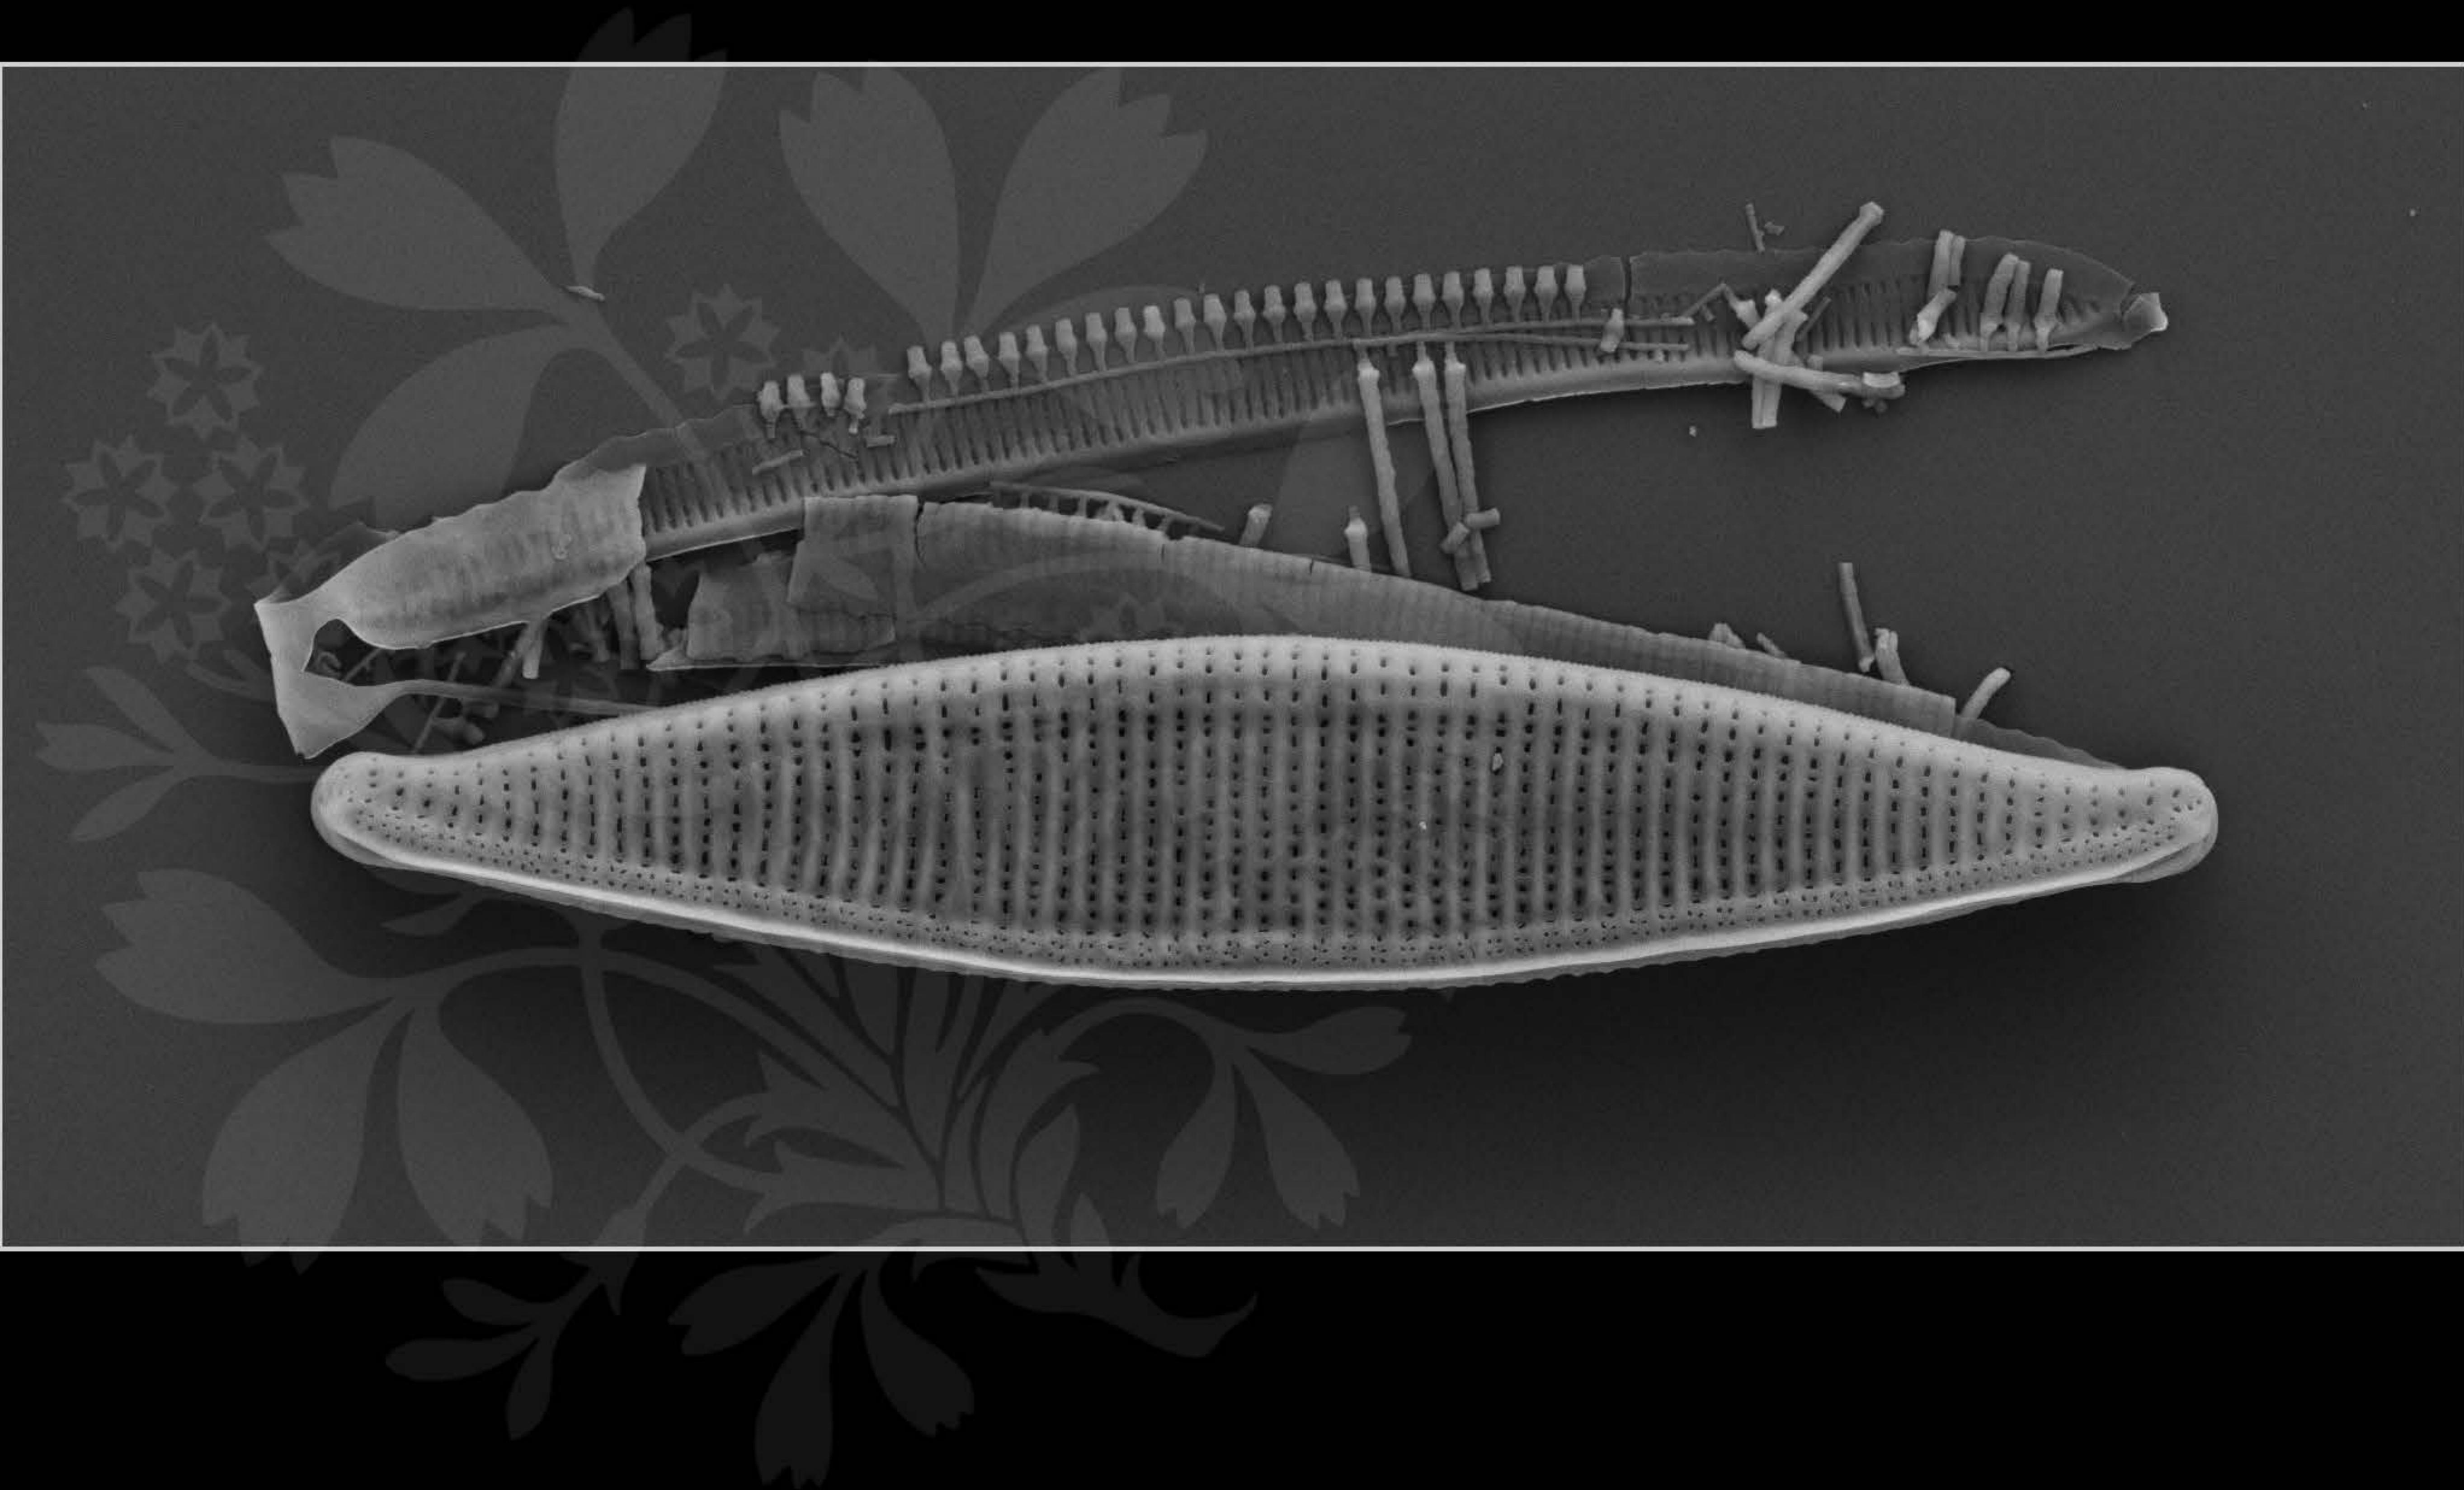

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_04.tif

Store resolution = 2048 * 1536 N = 6
Noise Reduction = Line Avg Scan Speed = 8



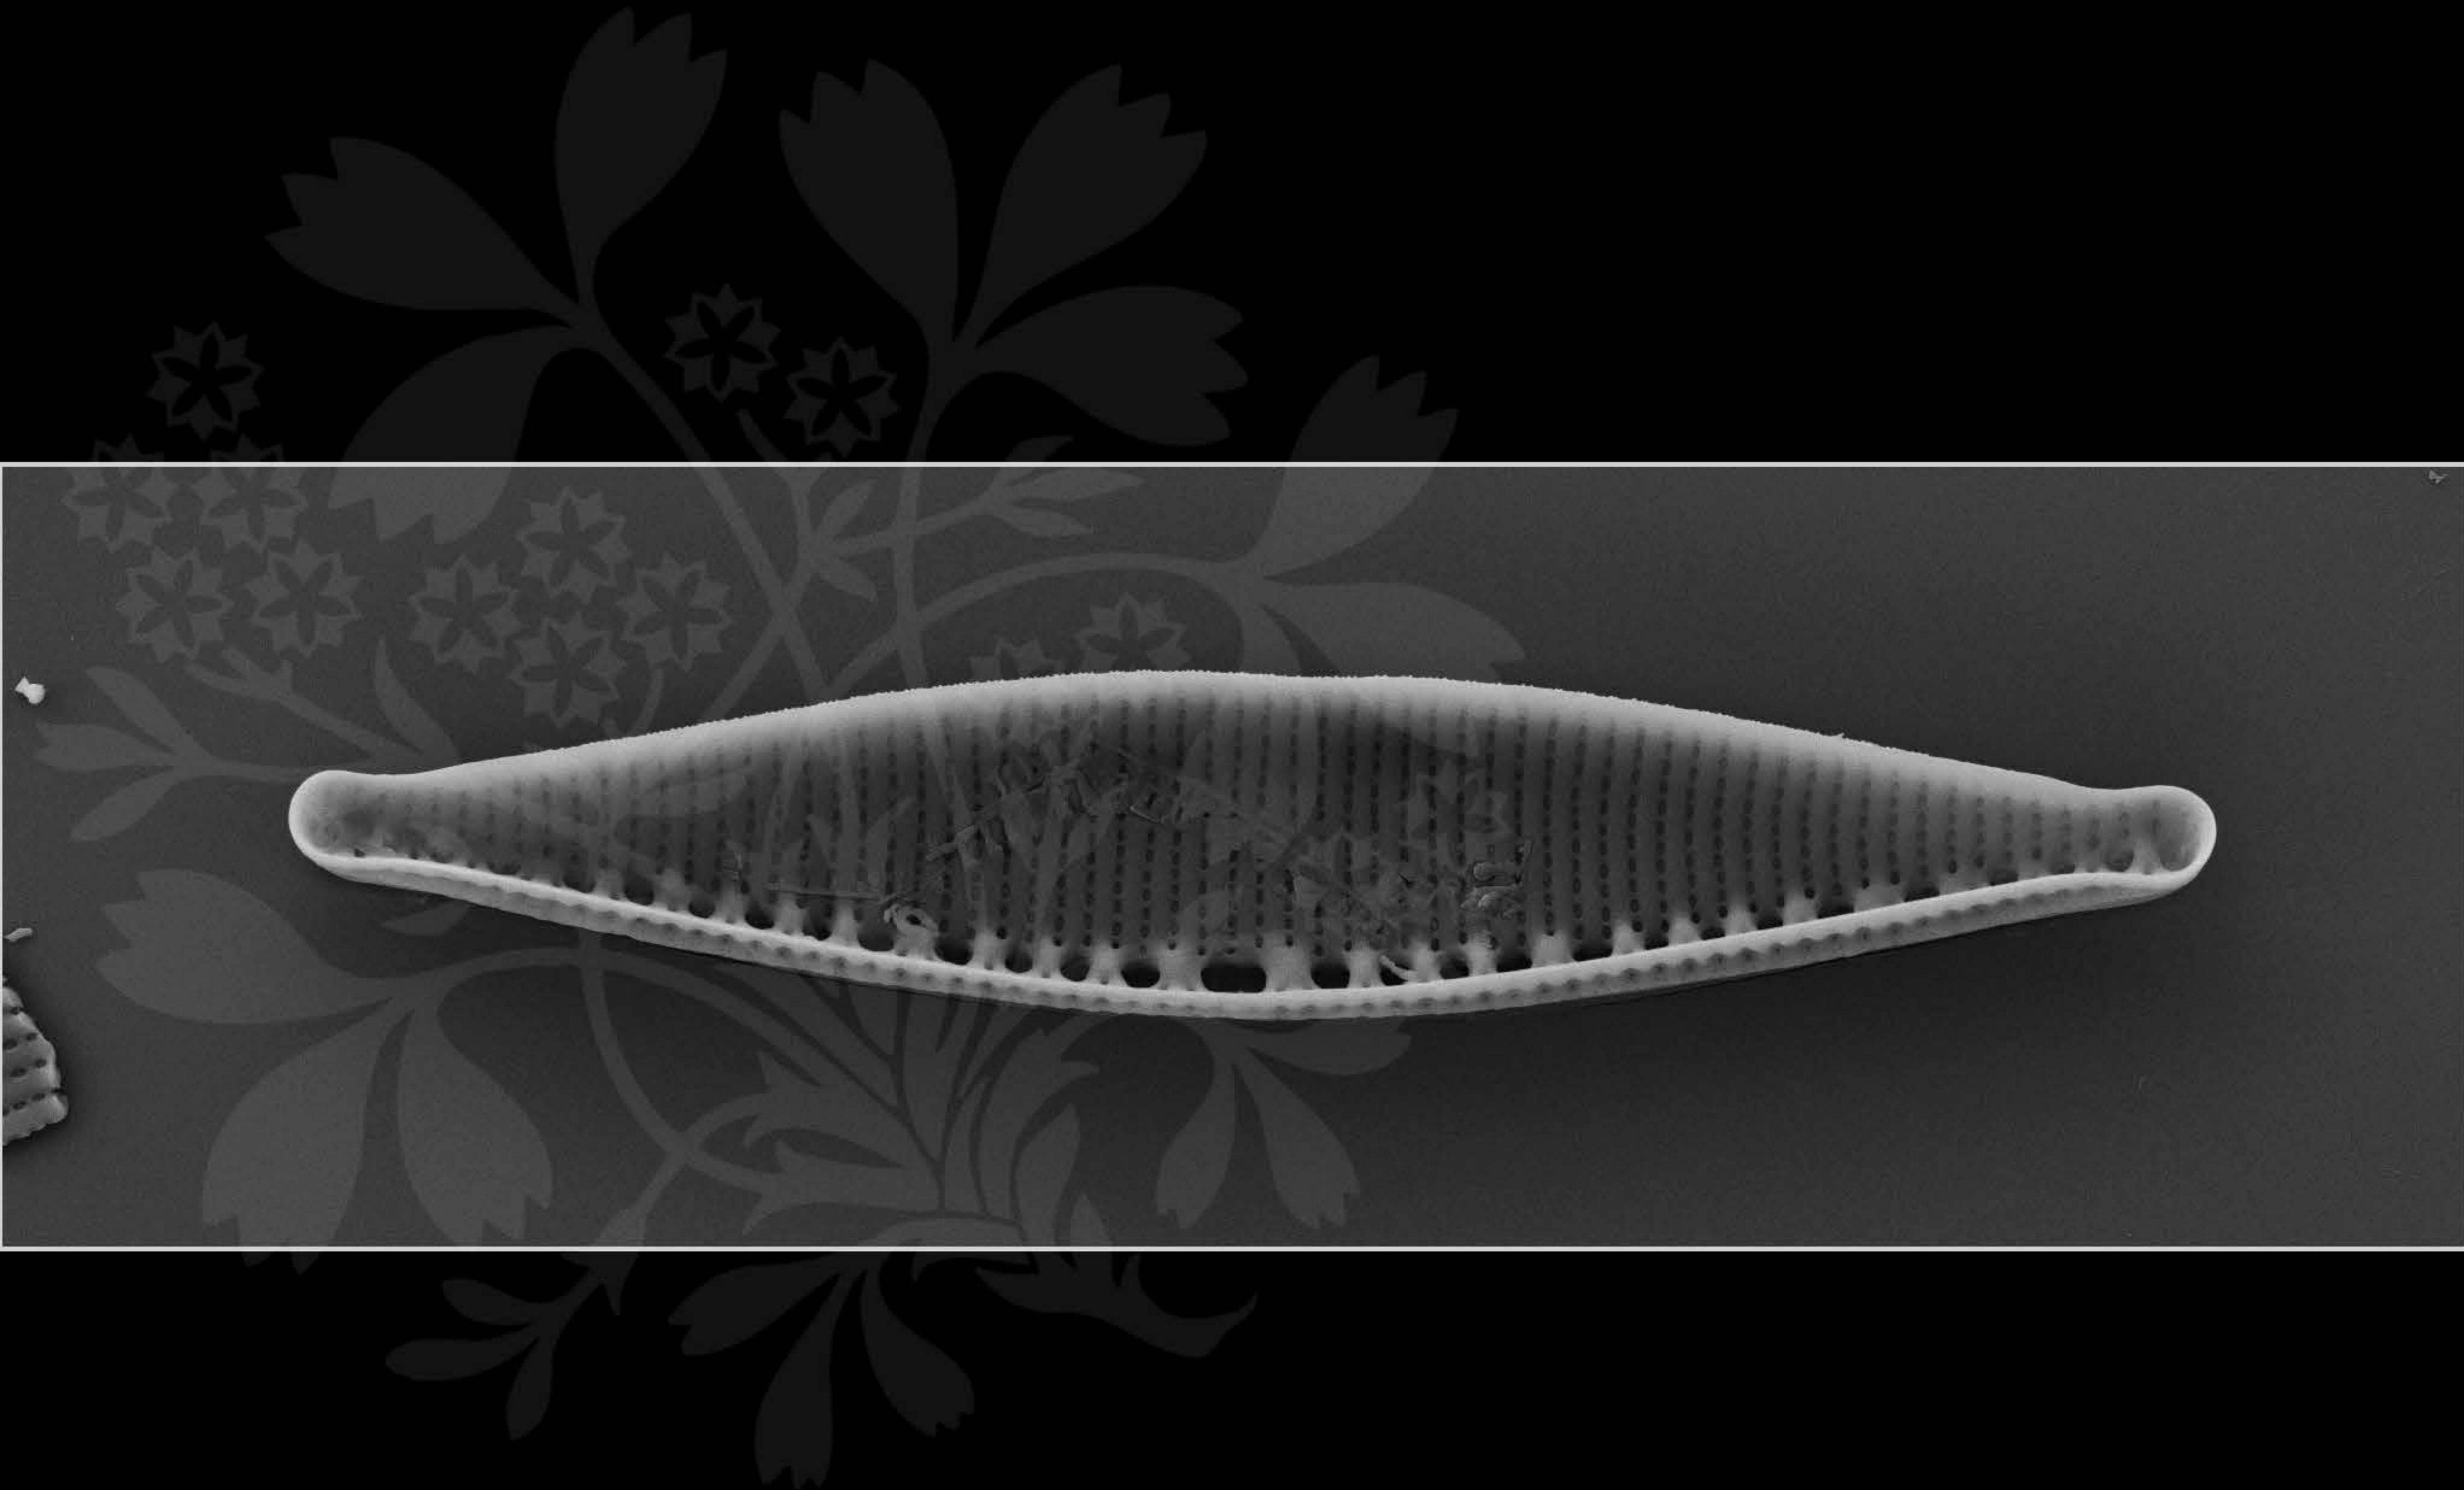

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_05.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



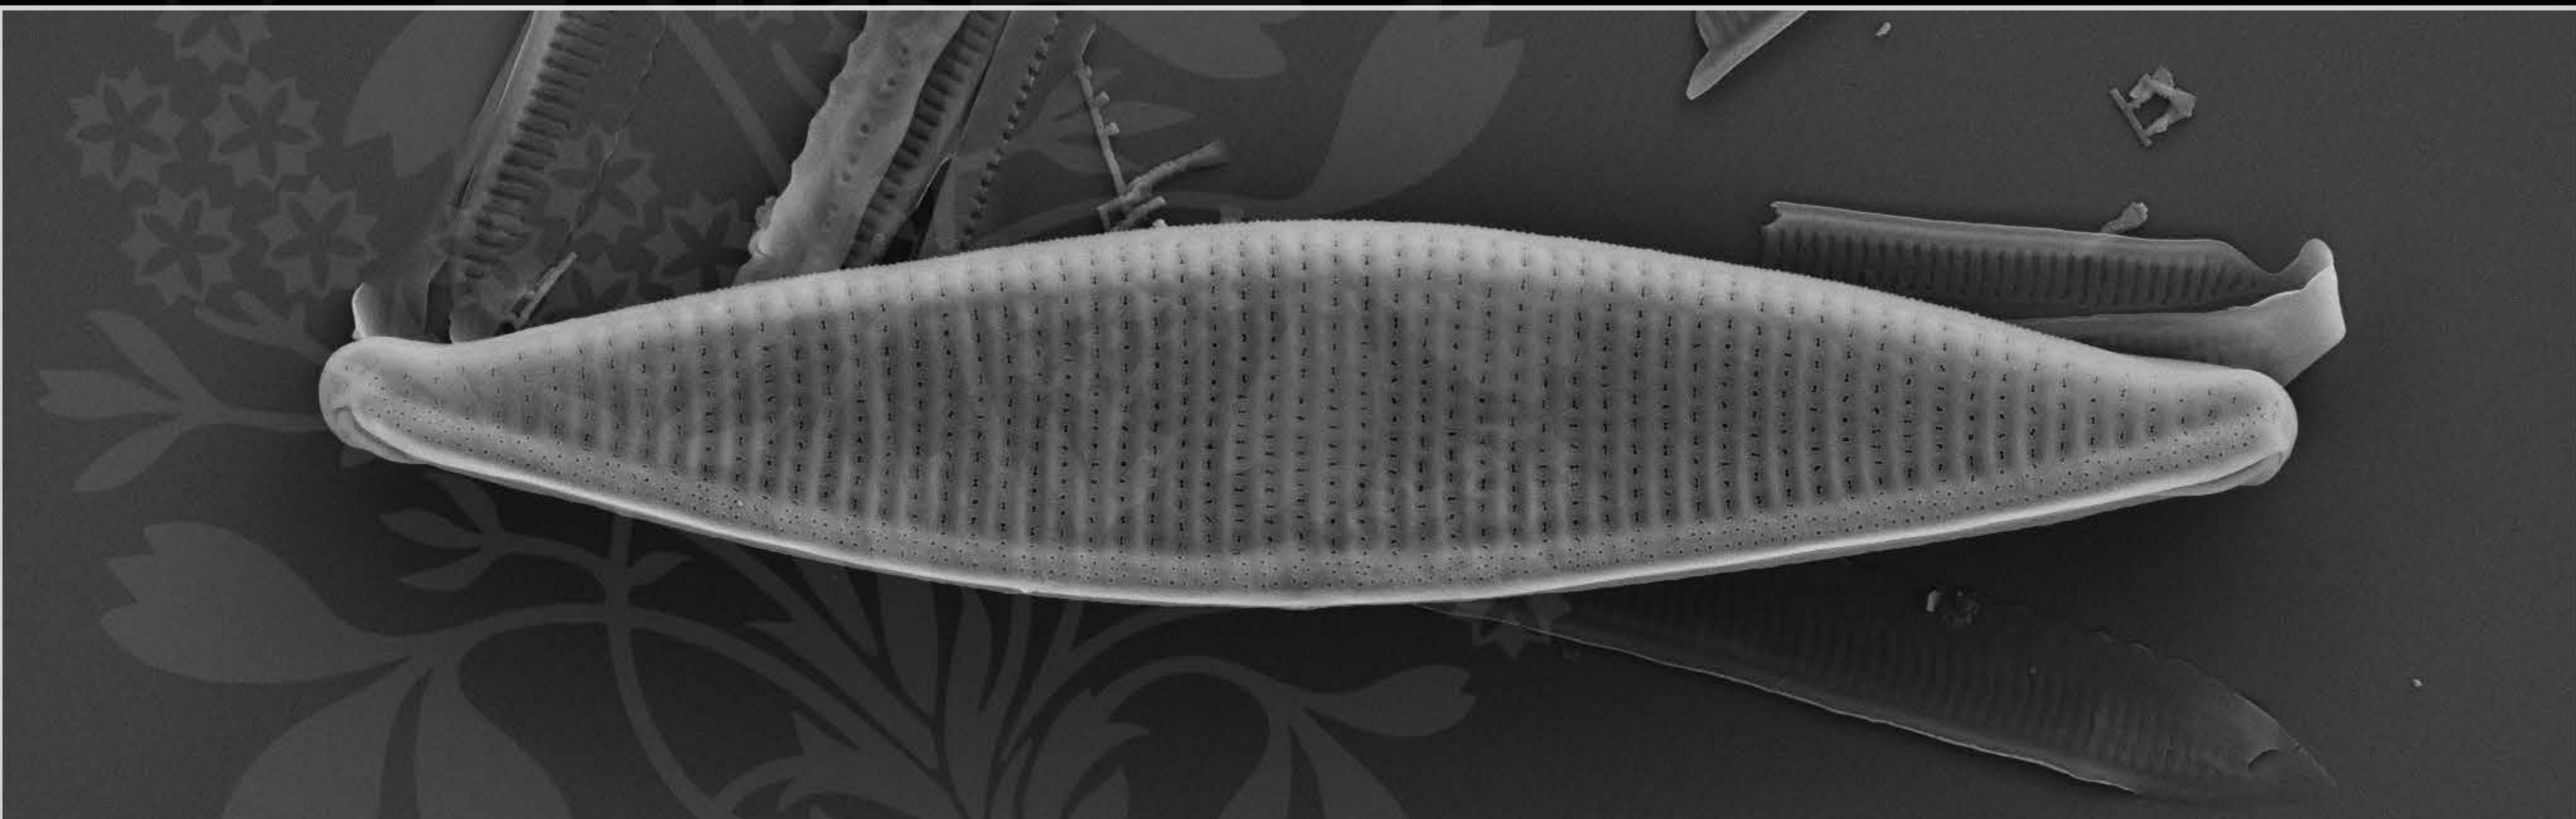

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_06.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



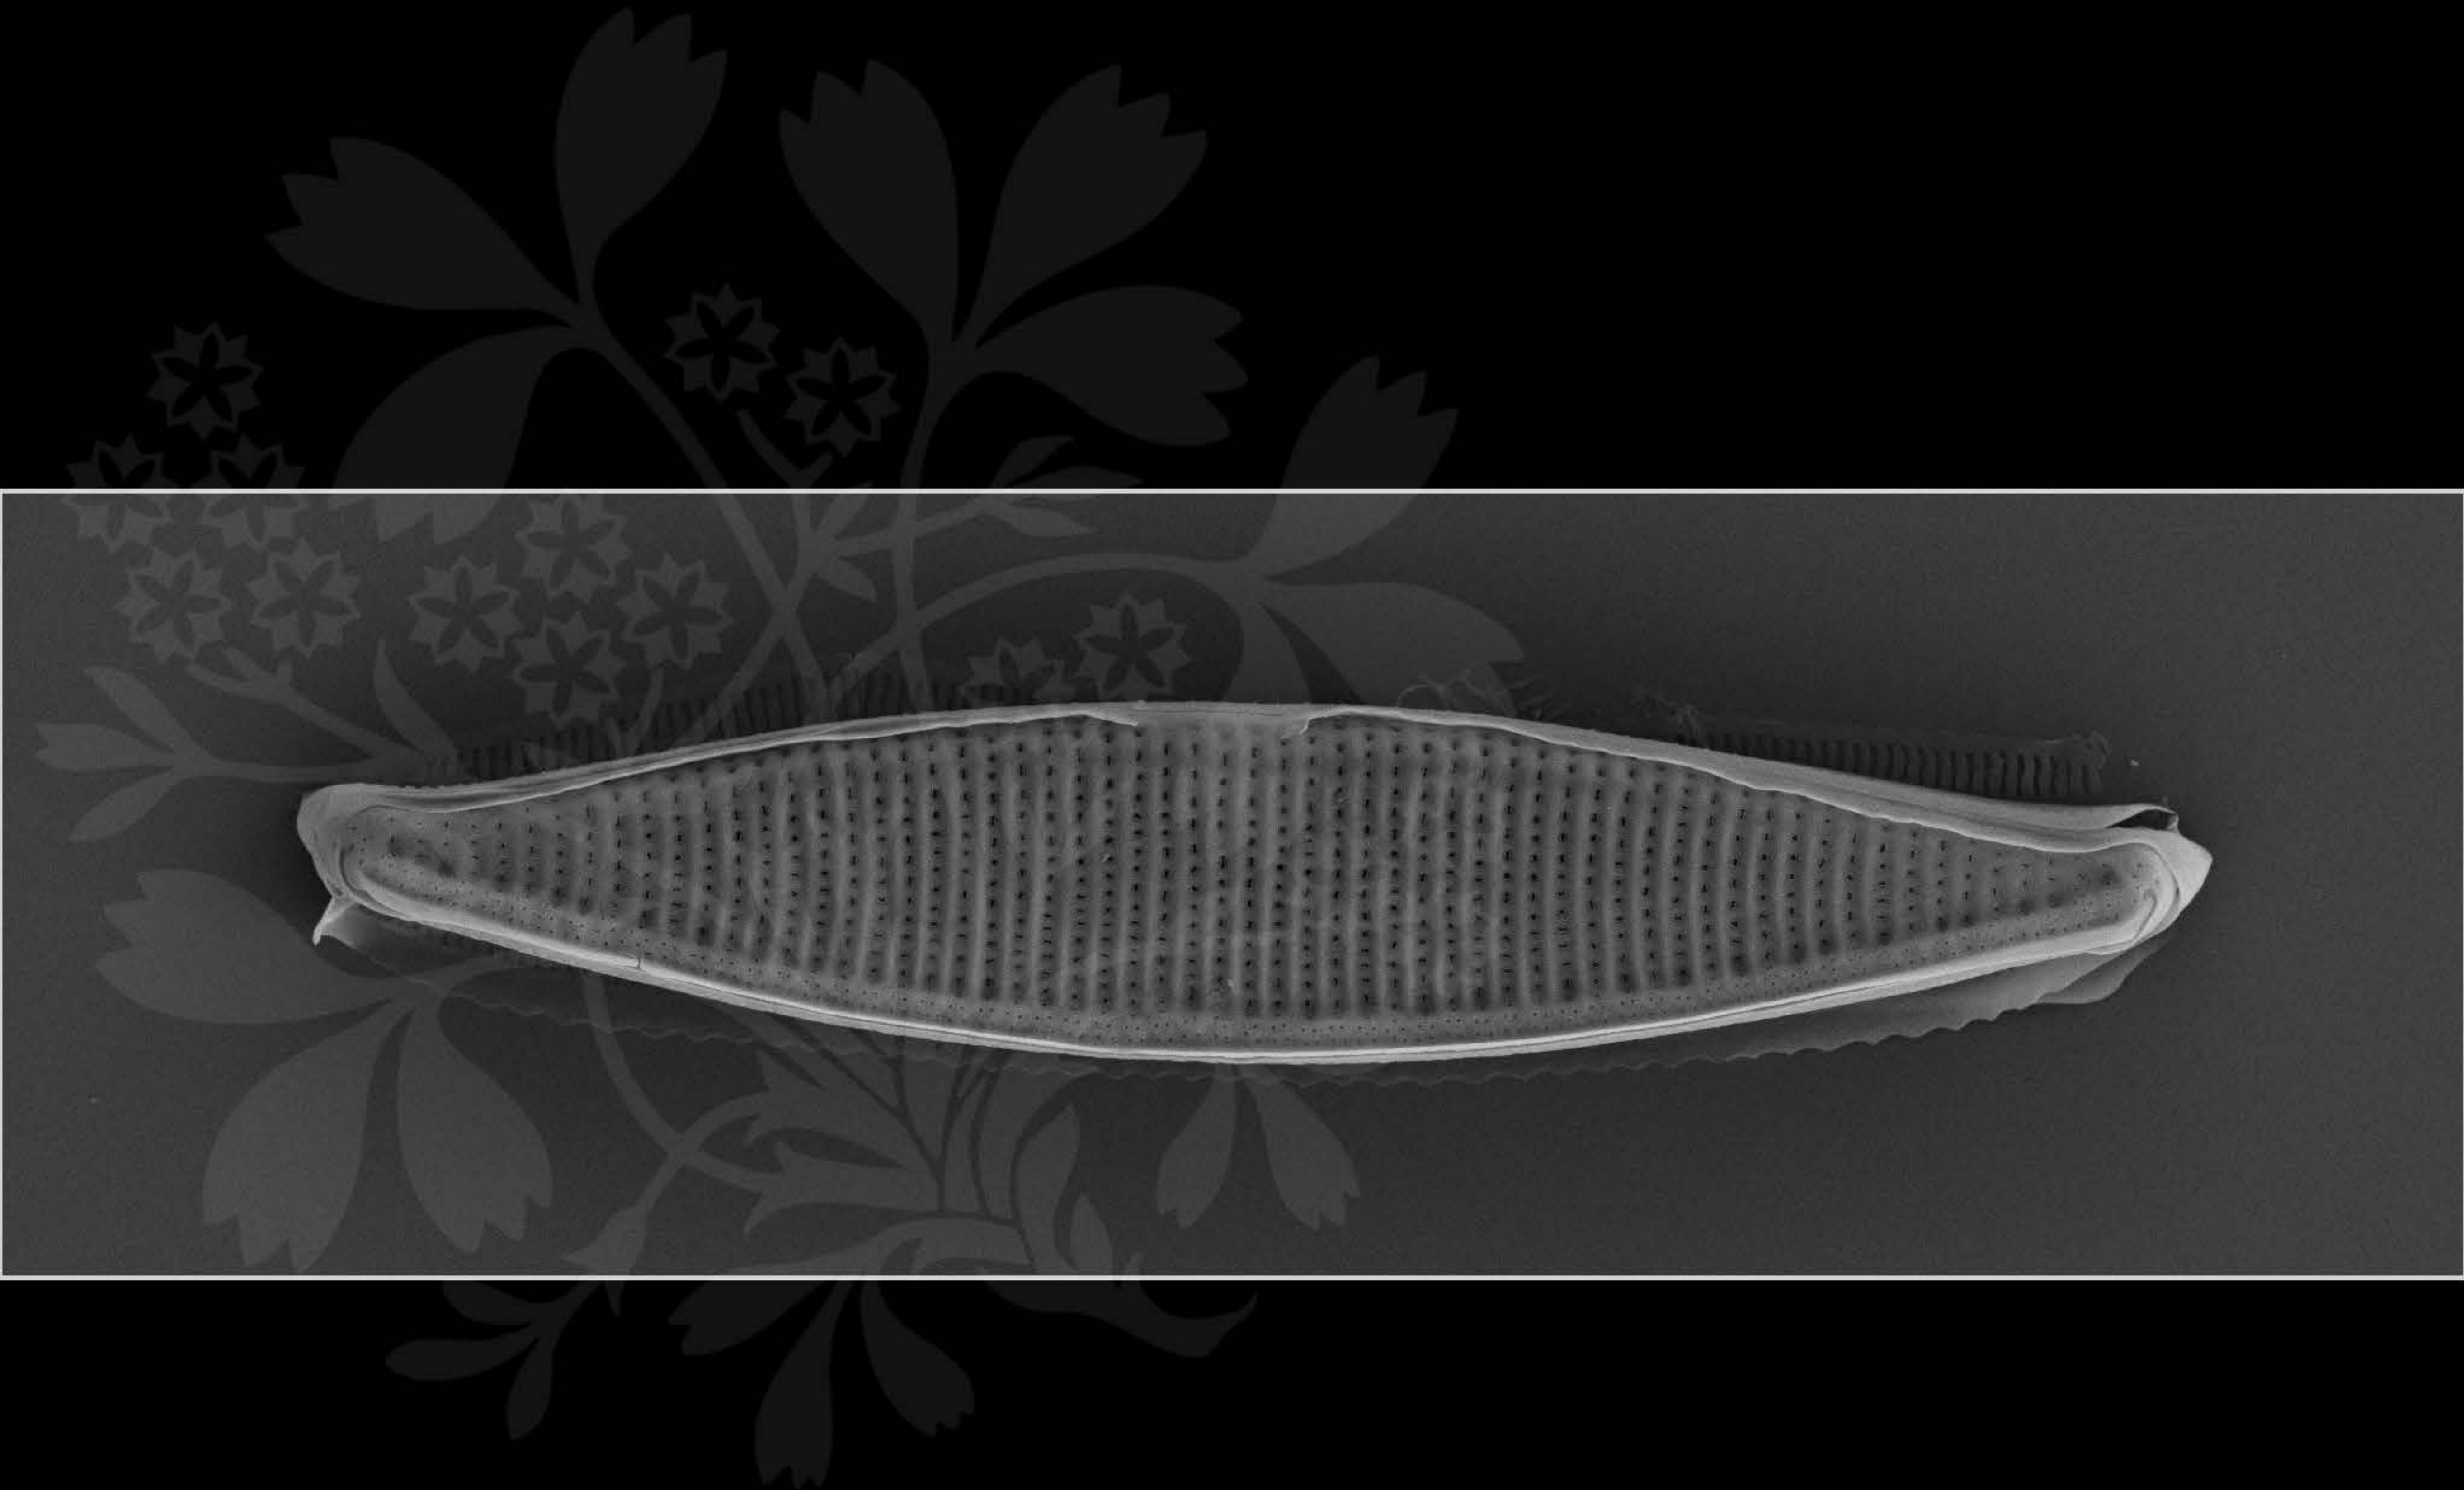

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_07.tif

Store resolution = 2048 * 1536 N = 6
Noise Reduction = Line Avg Scan Speed = 8



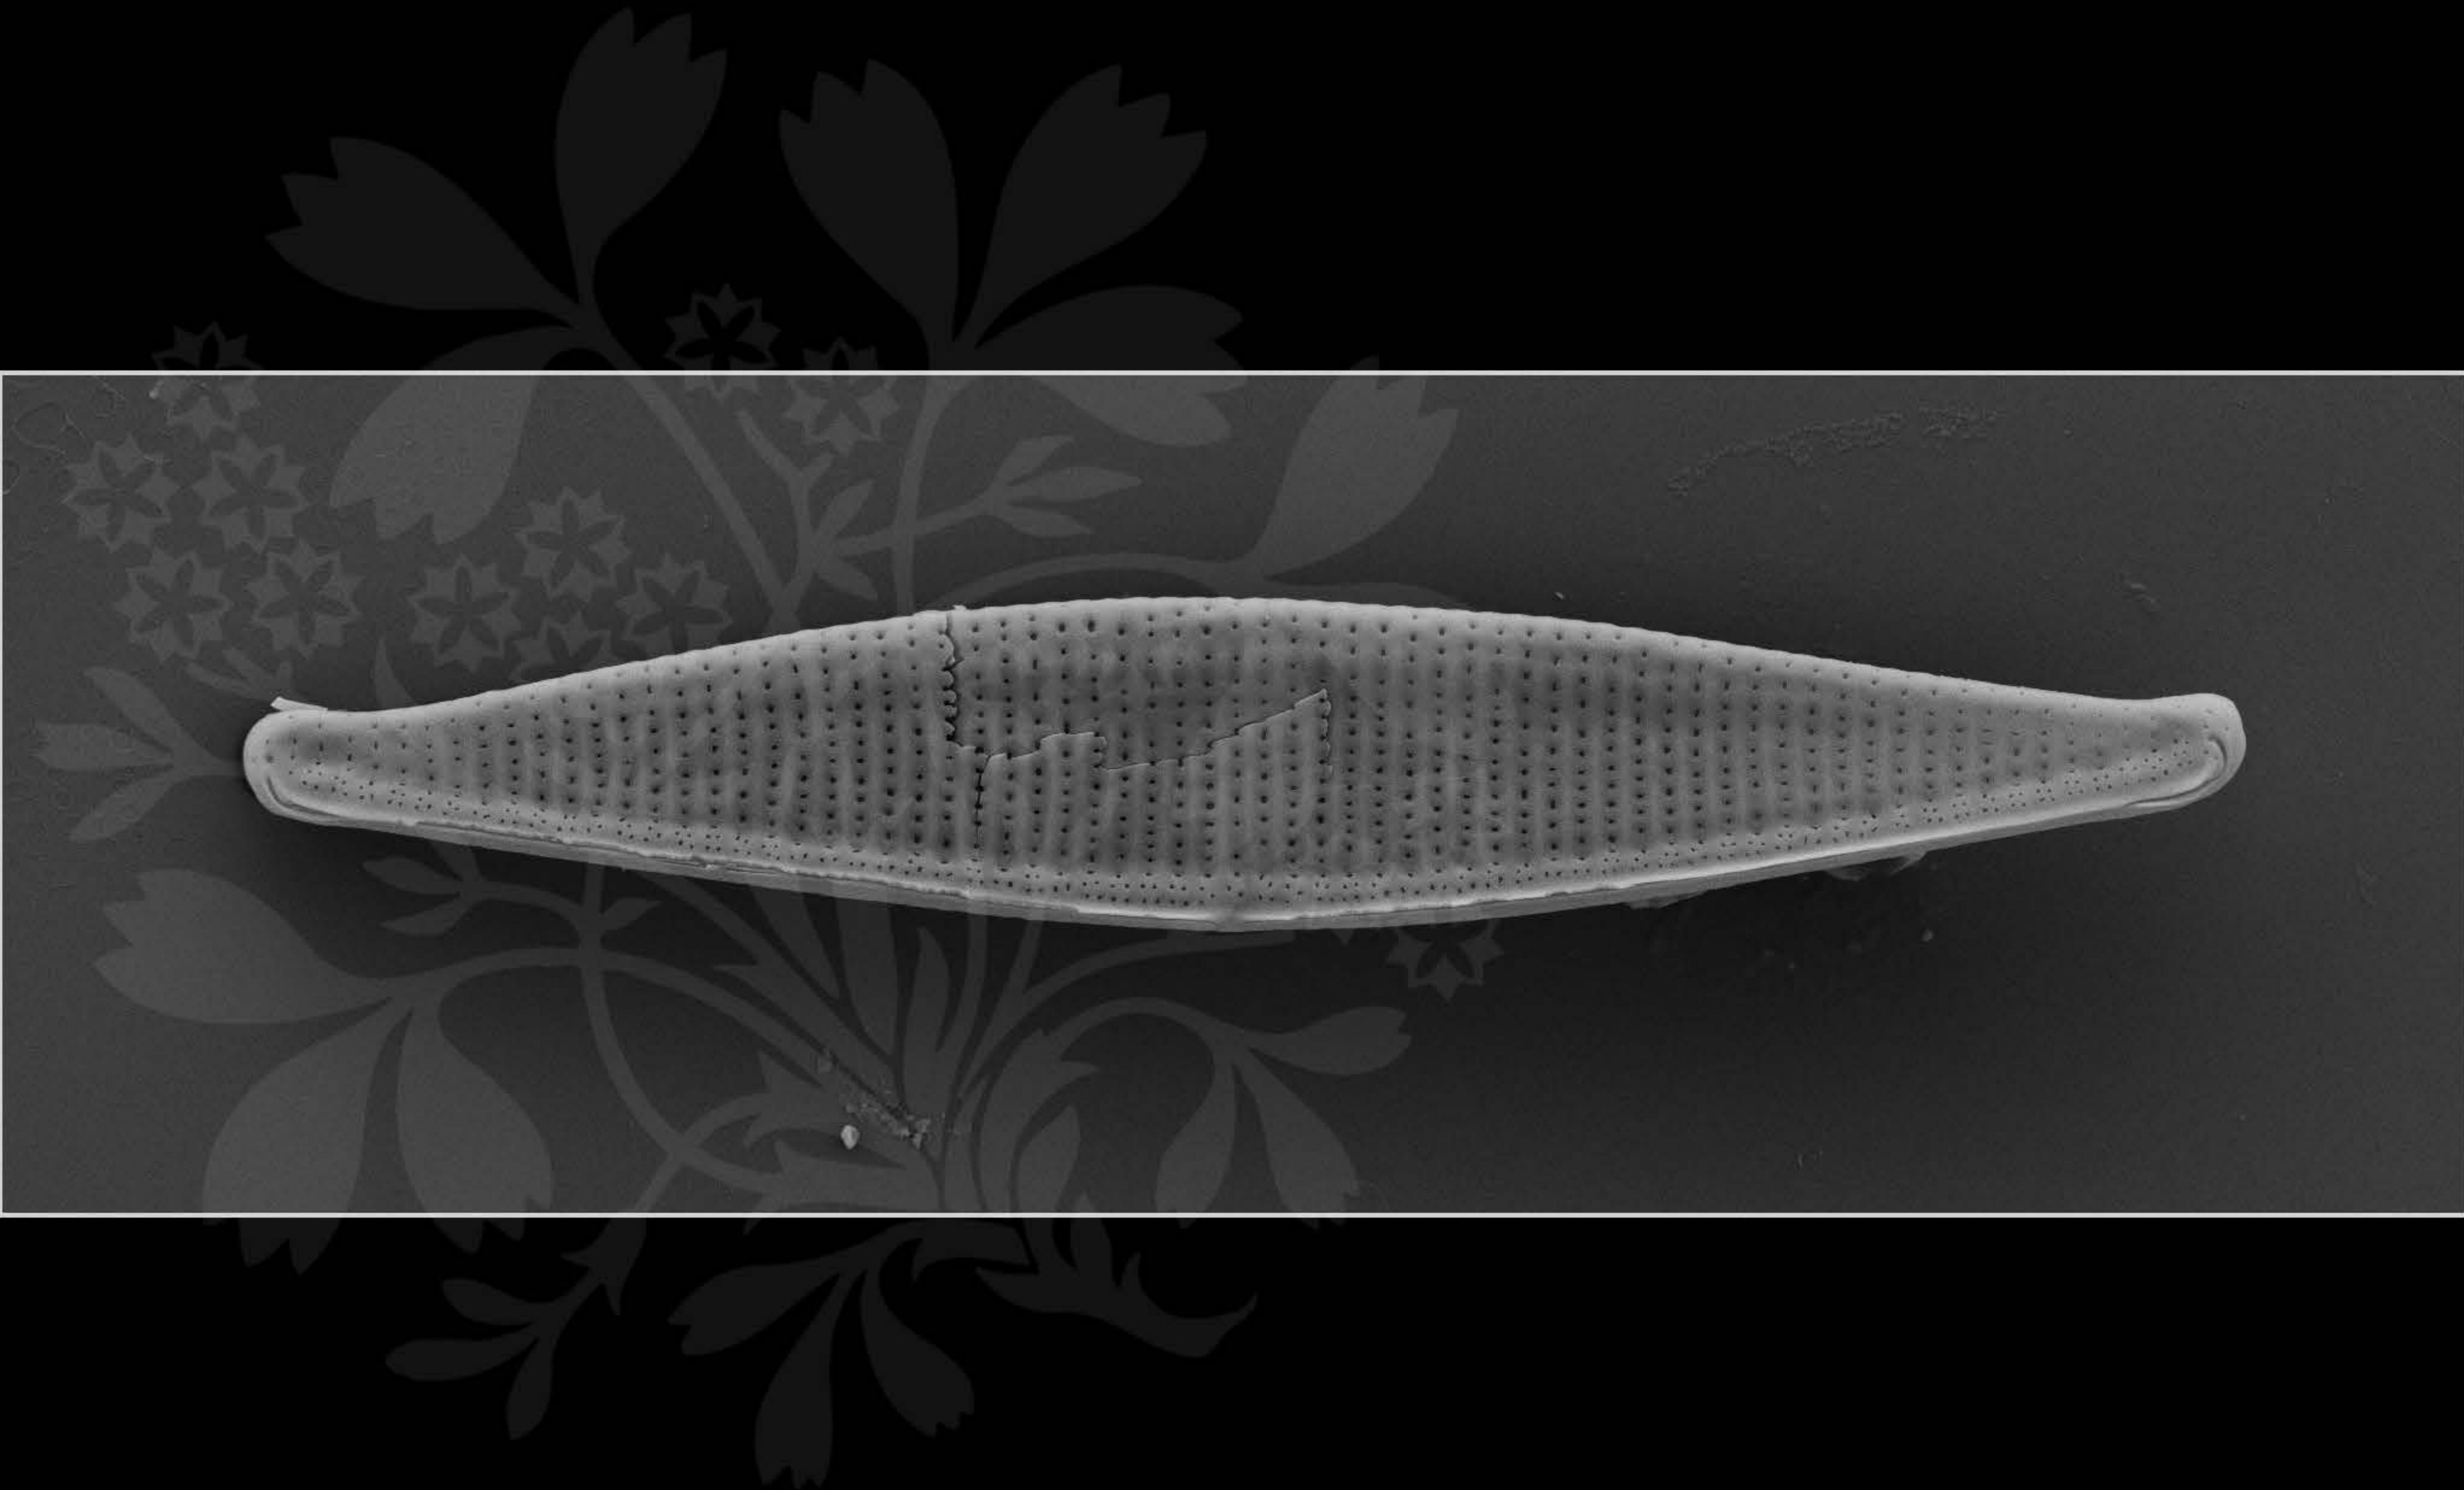

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_08.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



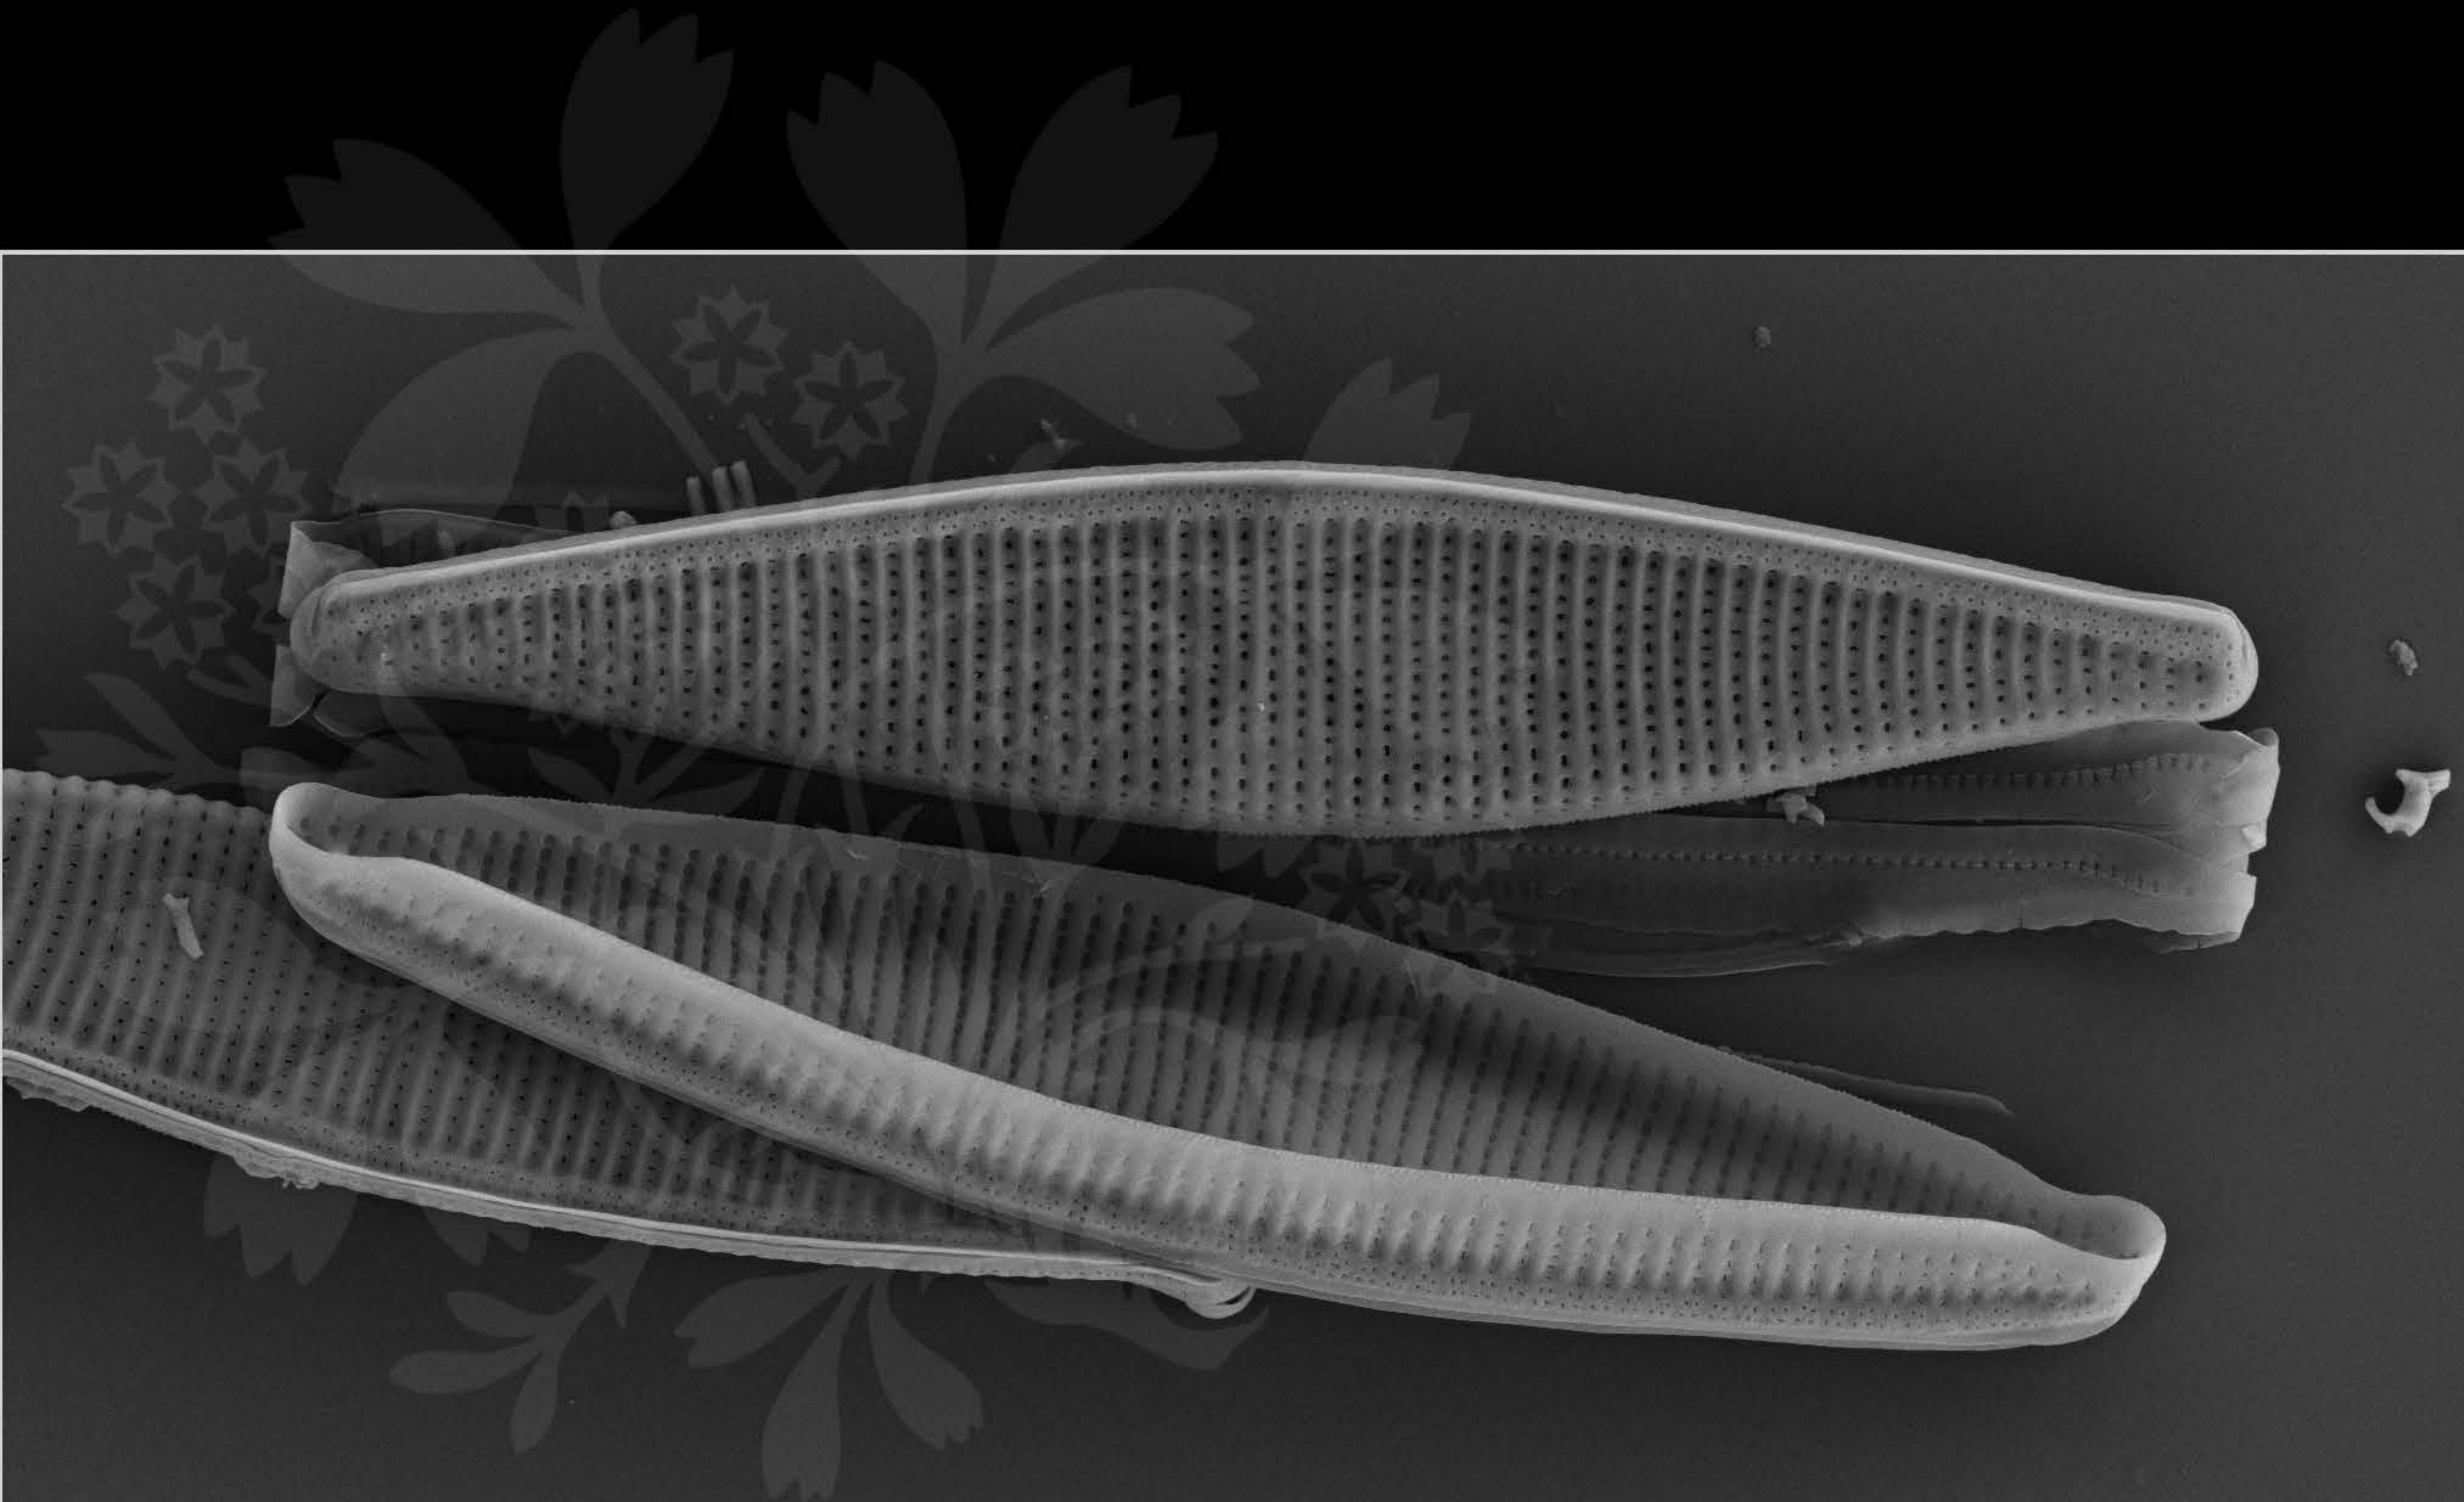

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_09.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



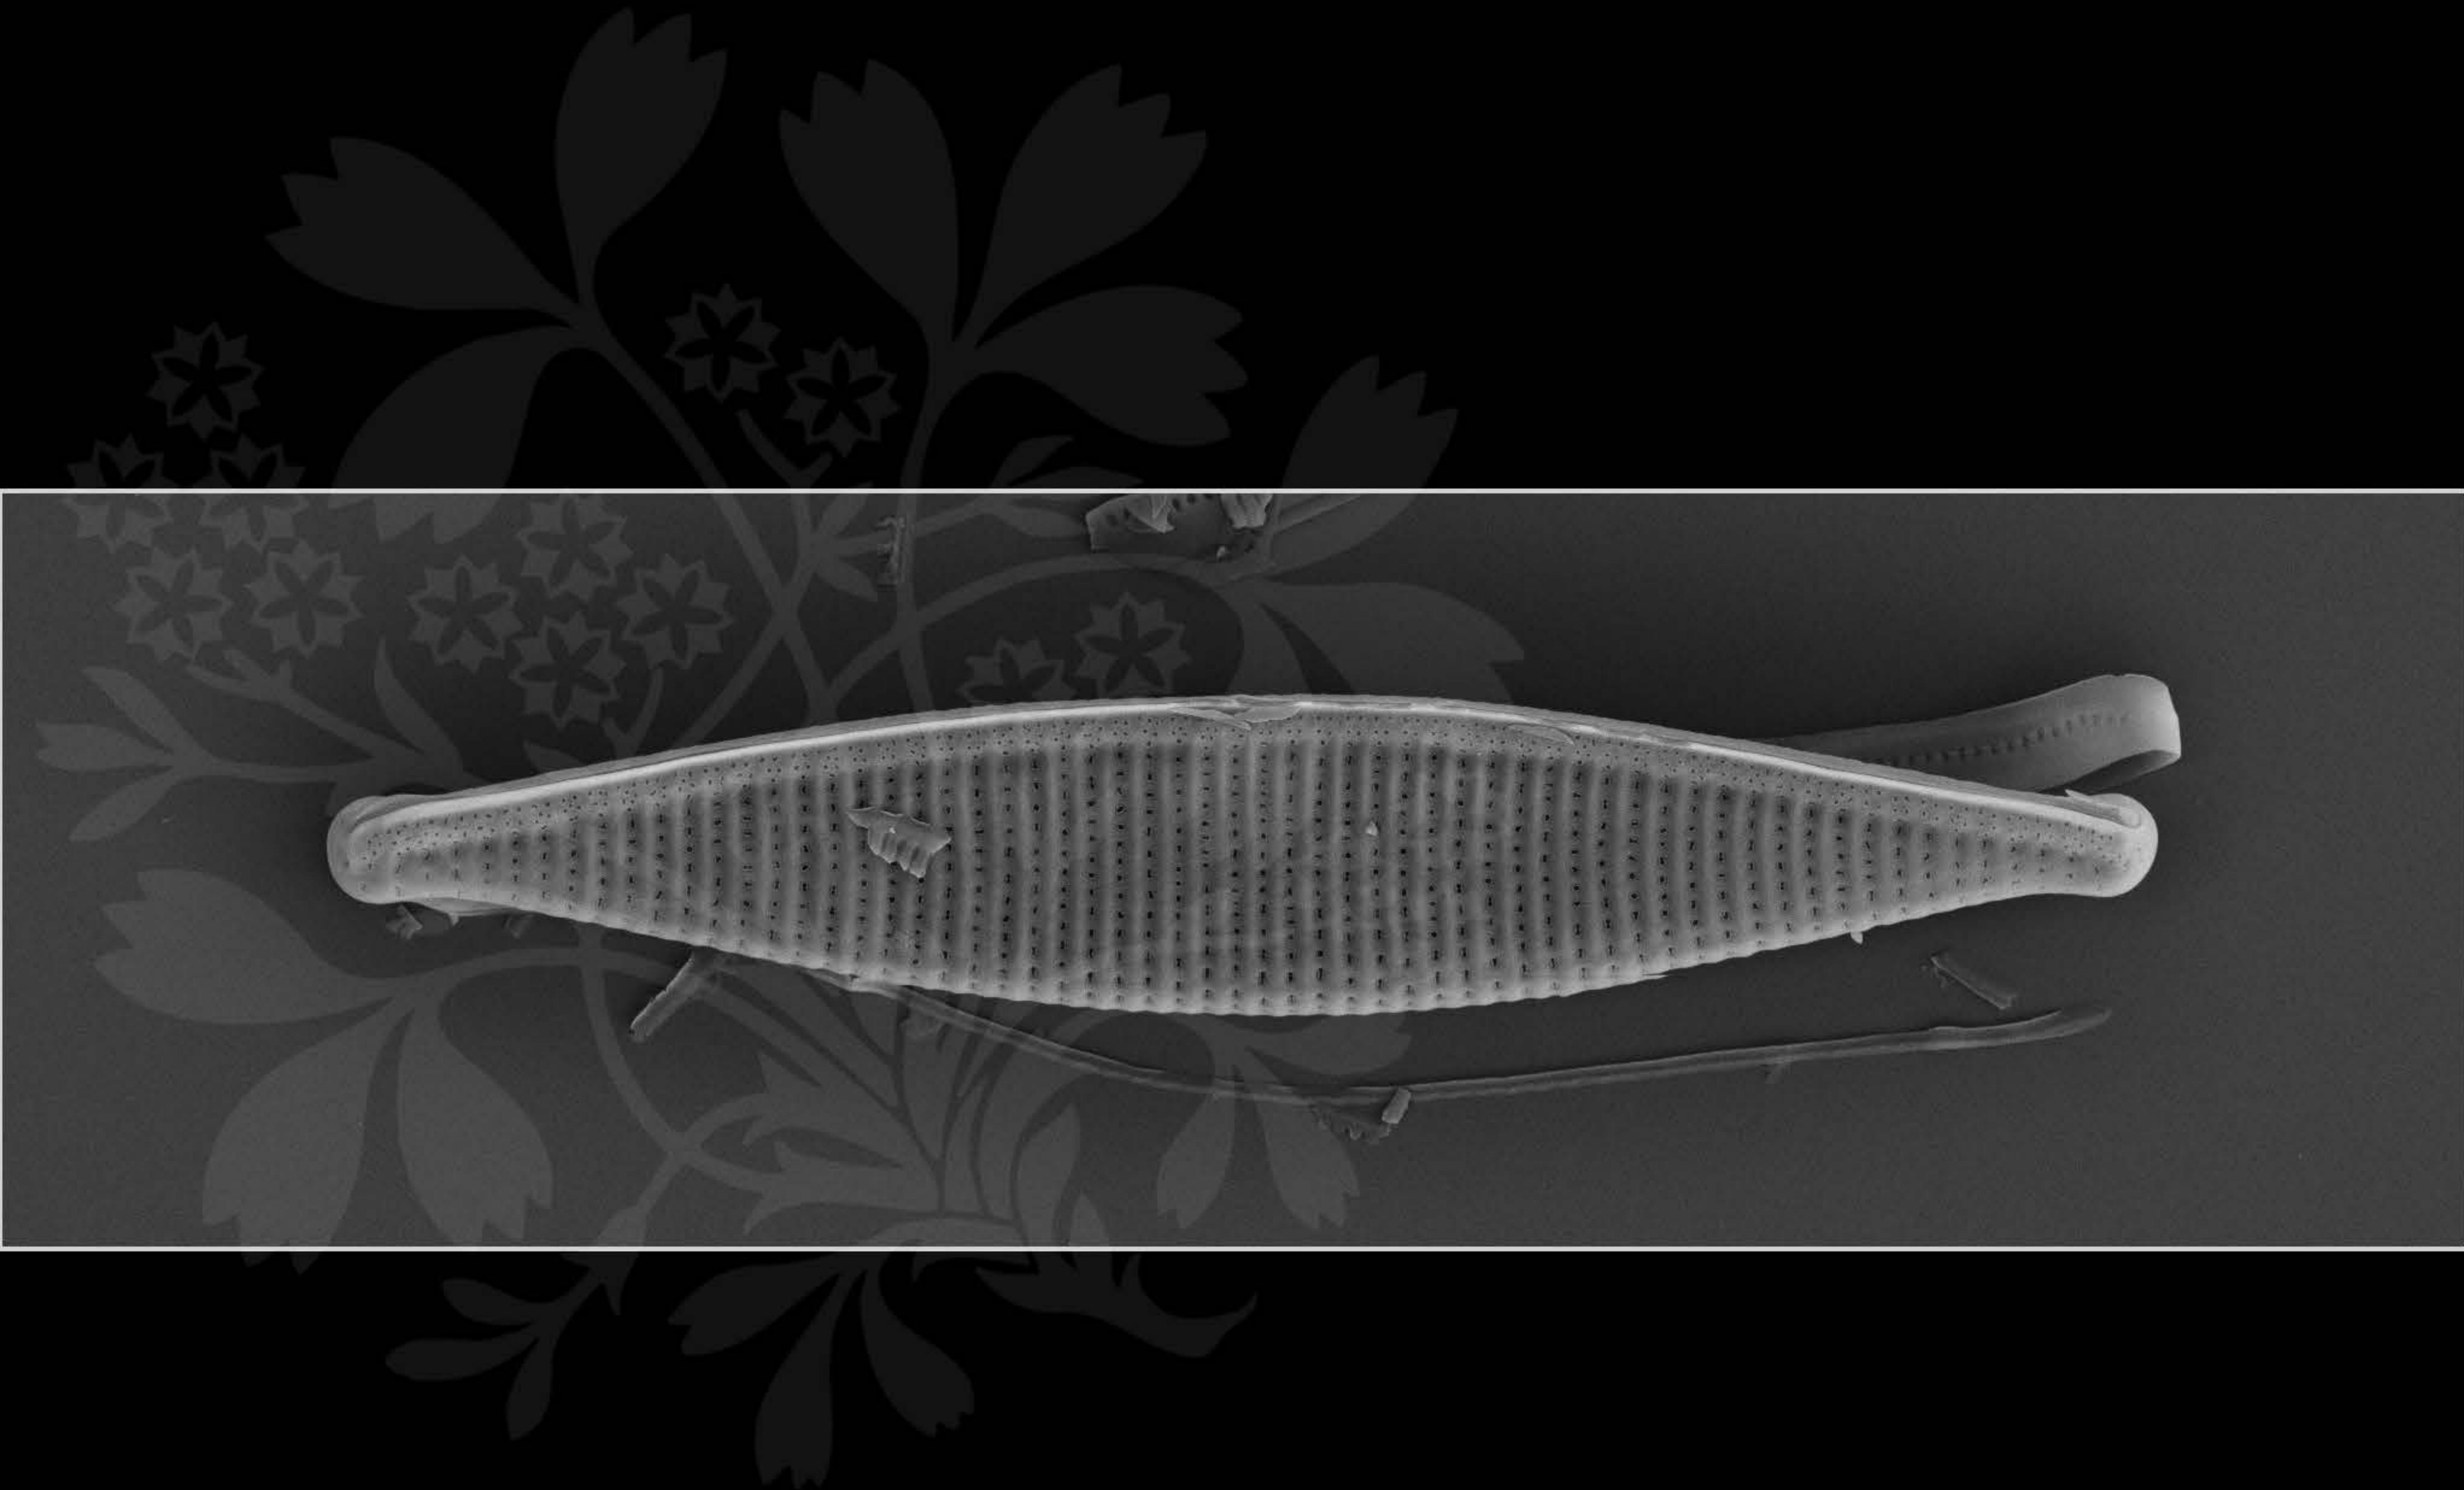

1 μm

100.0 μm

Mag = 8.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_10.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



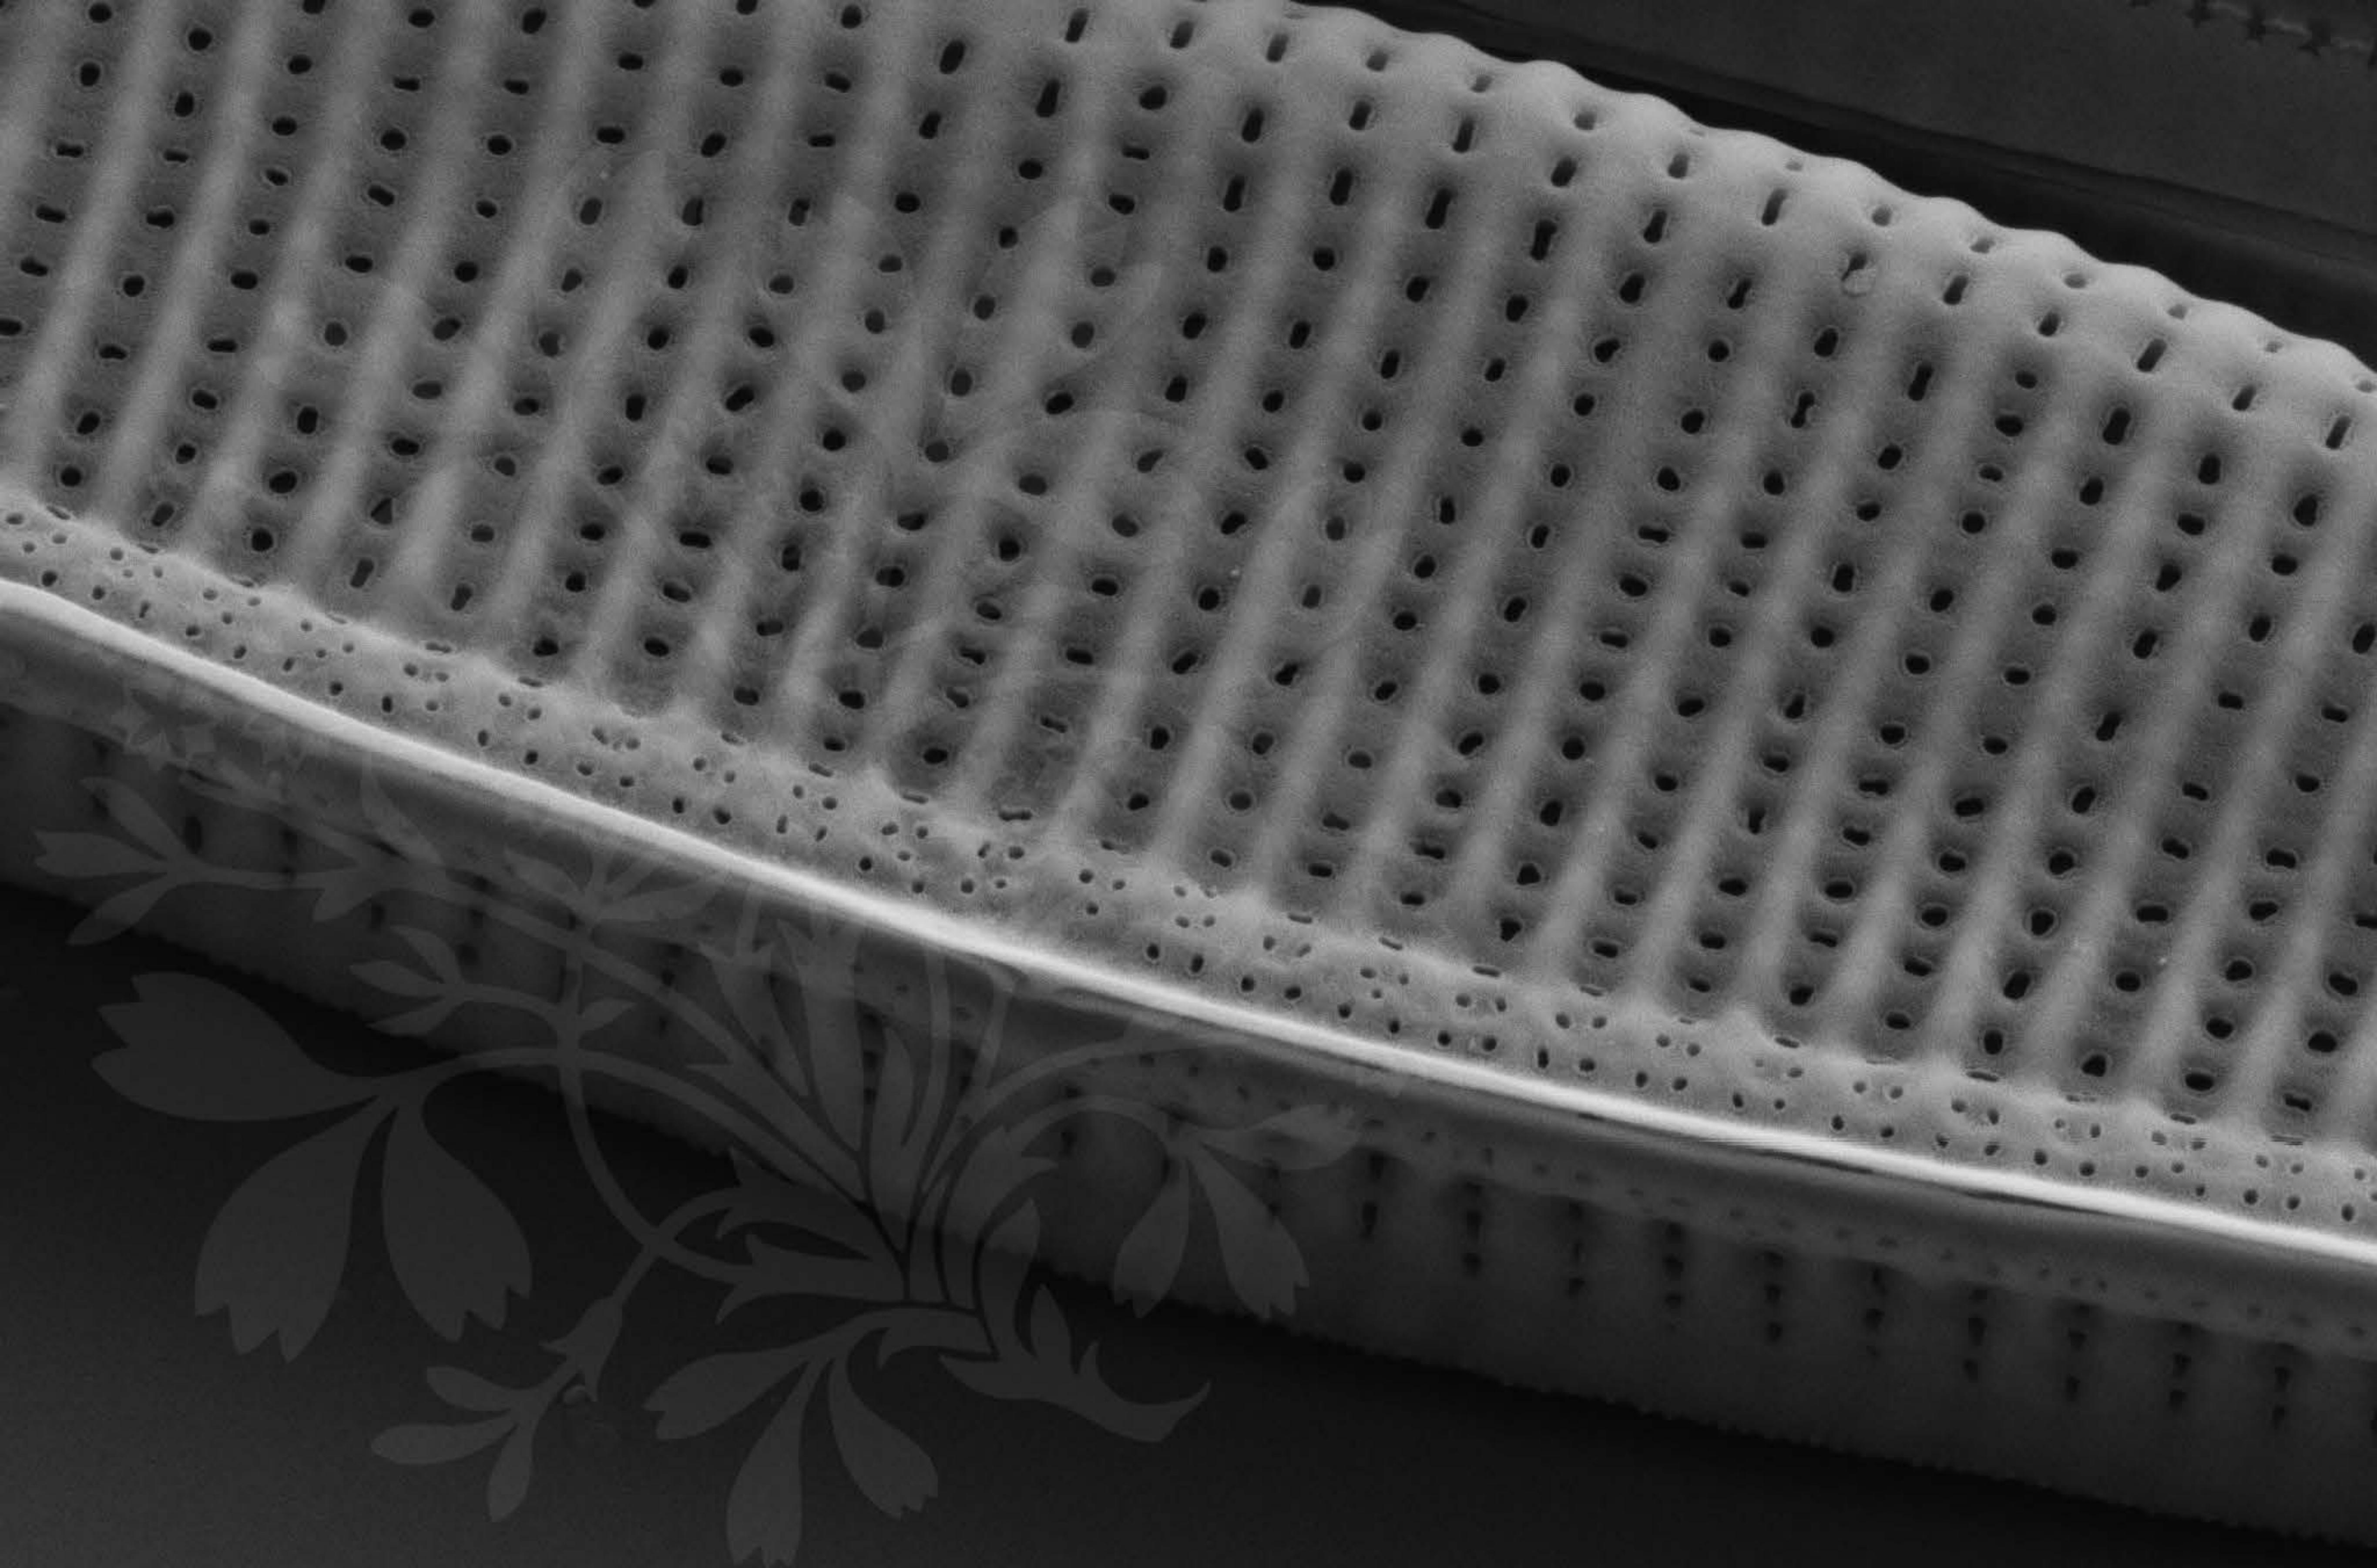

200 nm

100.0 μm

Mag = 30.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_11.tif

Store resolution = 2048 * 1536 N = 5
Noise Reduction = Line Avg Scan Speed = 8



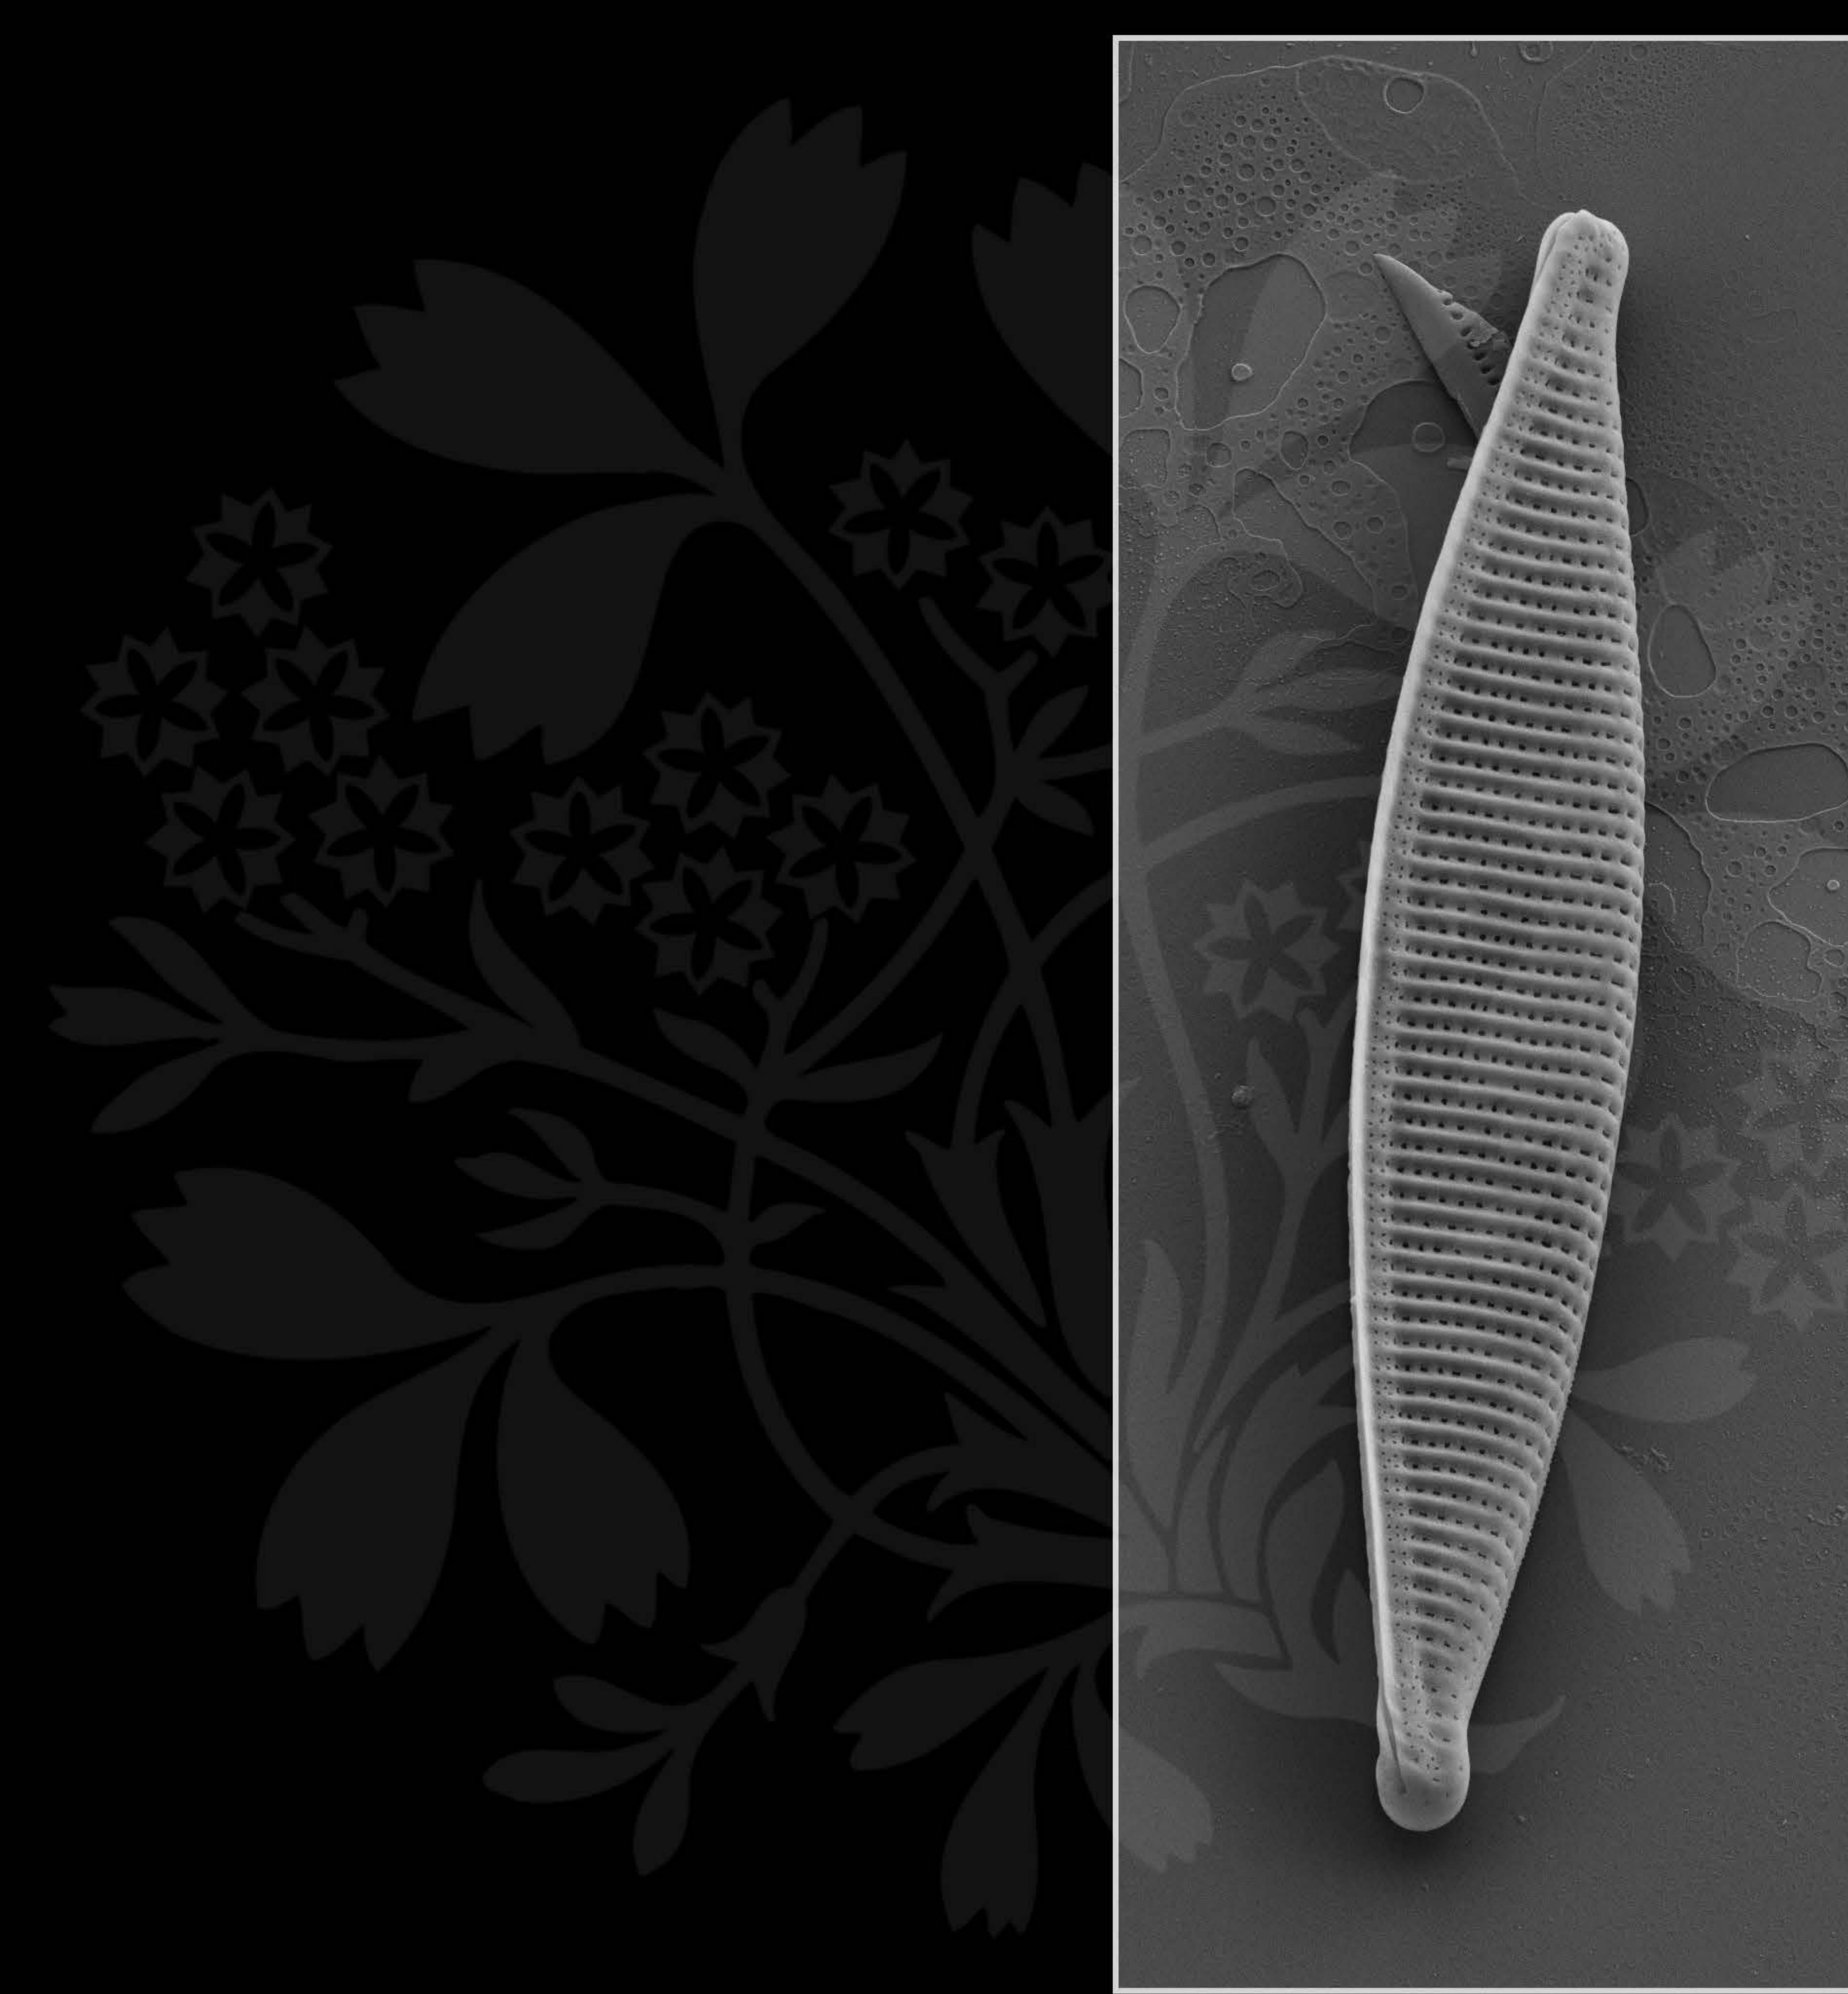

1 μm

100.0 μm

Mag = 6.00 K X

EHT = 5.00 kV


WD = 4.5 mm

Signal A = SE2 Date :23 Feb 2017

File Name = BC0461_12.tif

Store resolution = 3072 * 2304 N = 7
Noise Reduction = Line Avg Scan Speed = 8



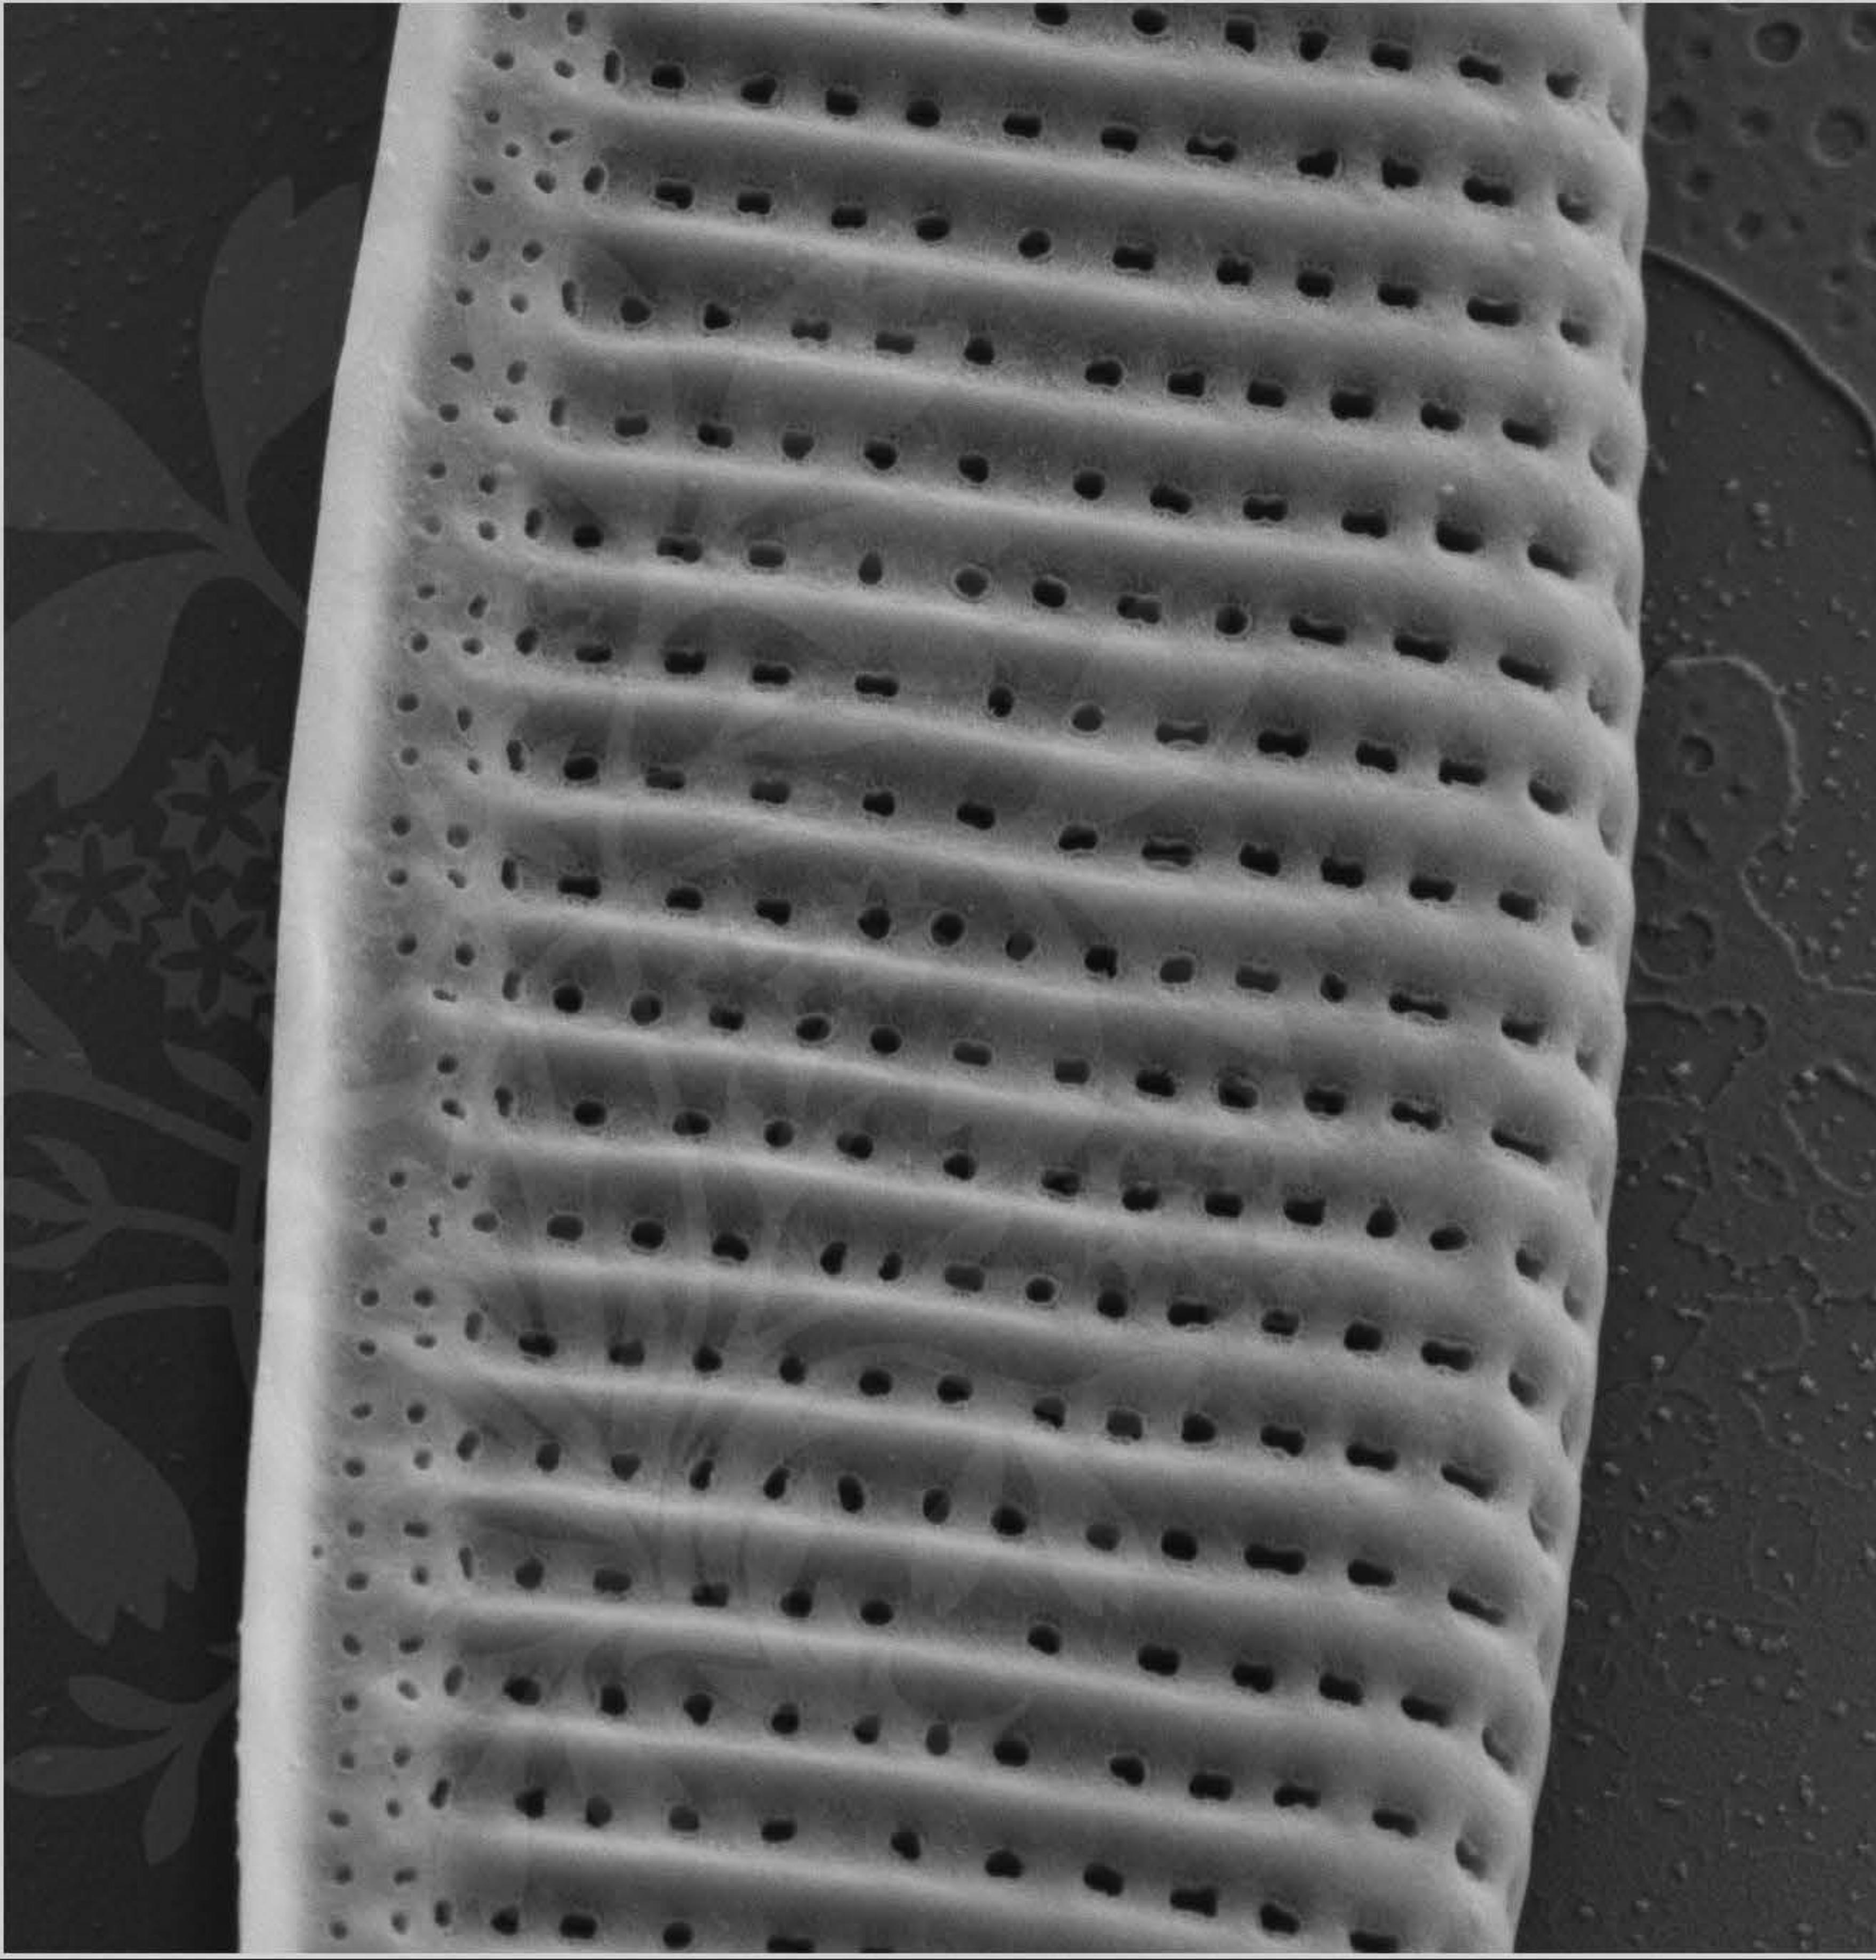

200 nm

Mag = 30.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

100.0 μm

WD = 4.5 mm

File Name = BC0461_13.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8

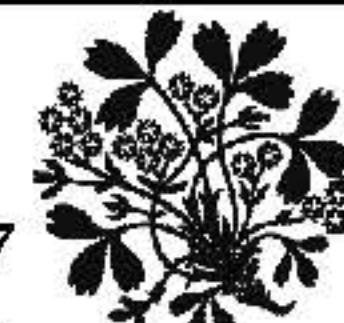



1 μm

100.0 μm

Mag = 6.00 K X

WD = 4.5 mm


EHT = 5.00 kV

File Name = BC0461_14.tif

Signal A = SE2 Date :23 Feb 2017

Store resolution = 3072 * 2304 N = 6
Noise Reduction = Line Avg Scan Speed = 8



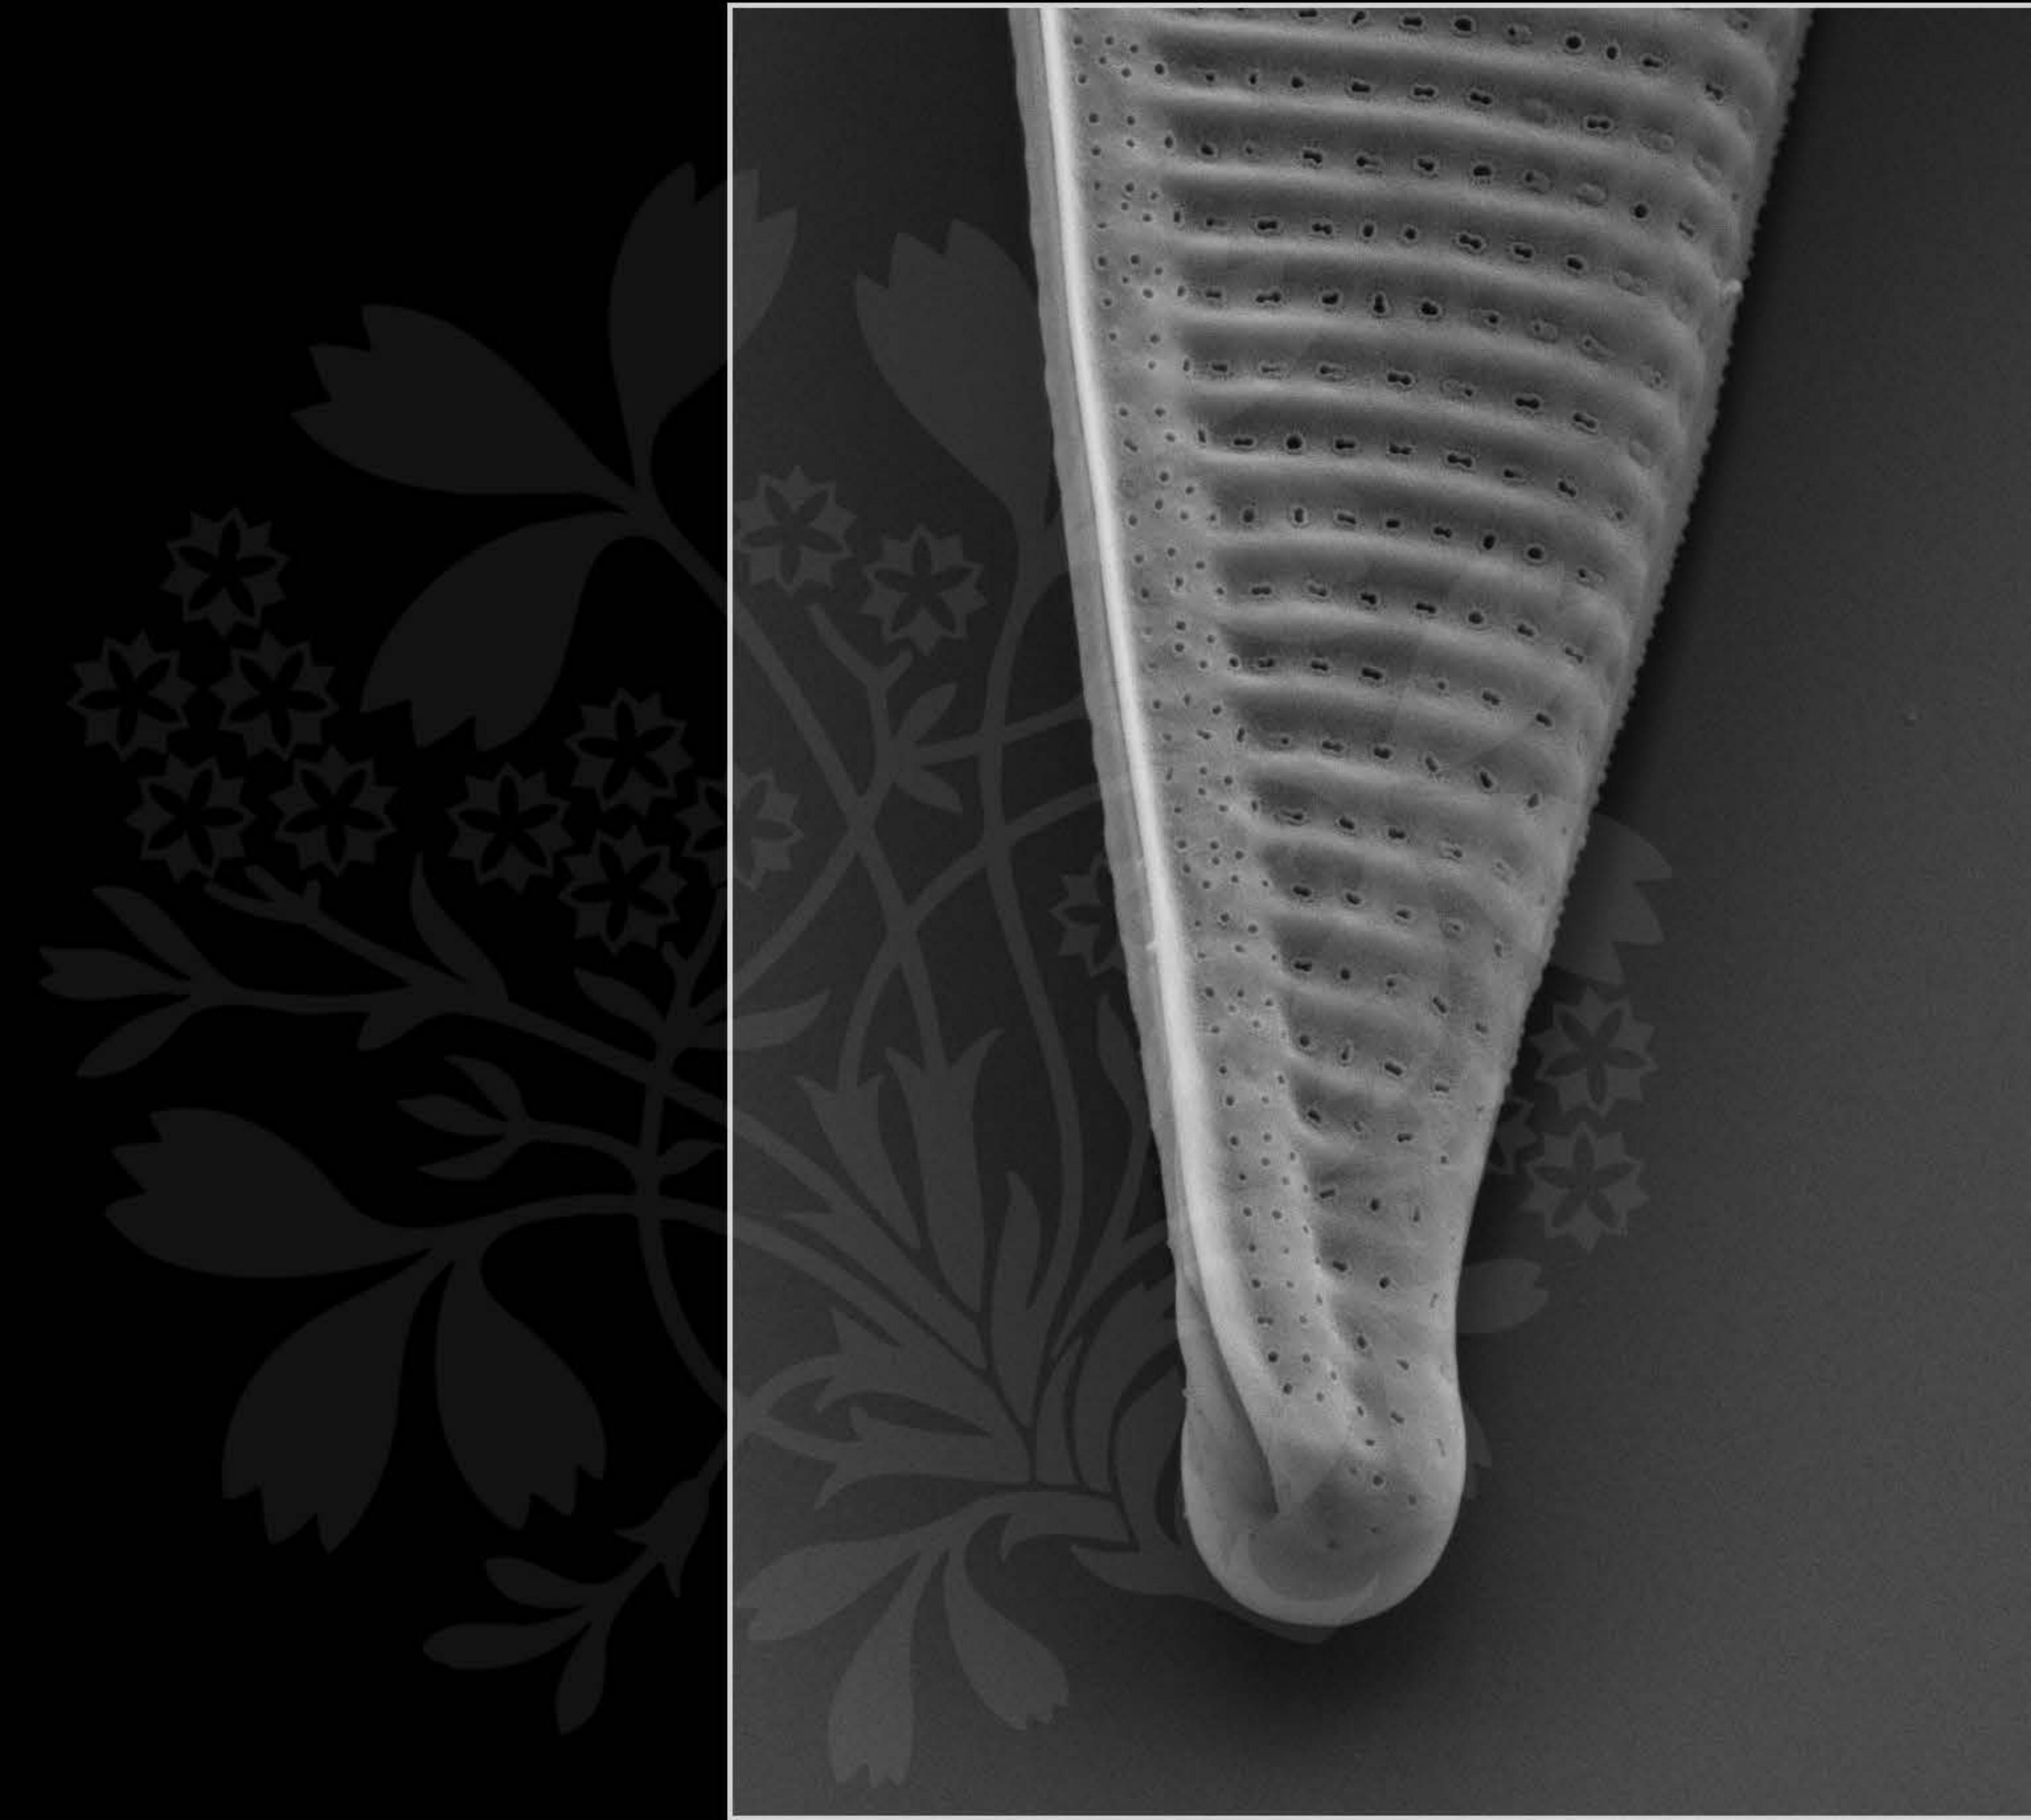

1 μm

100.0 μm

Mag = 20.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_15.tif

Store resolution = 2048 * 1536 N = 7
Noise Reduction = Line Avg Scan Speed = 8



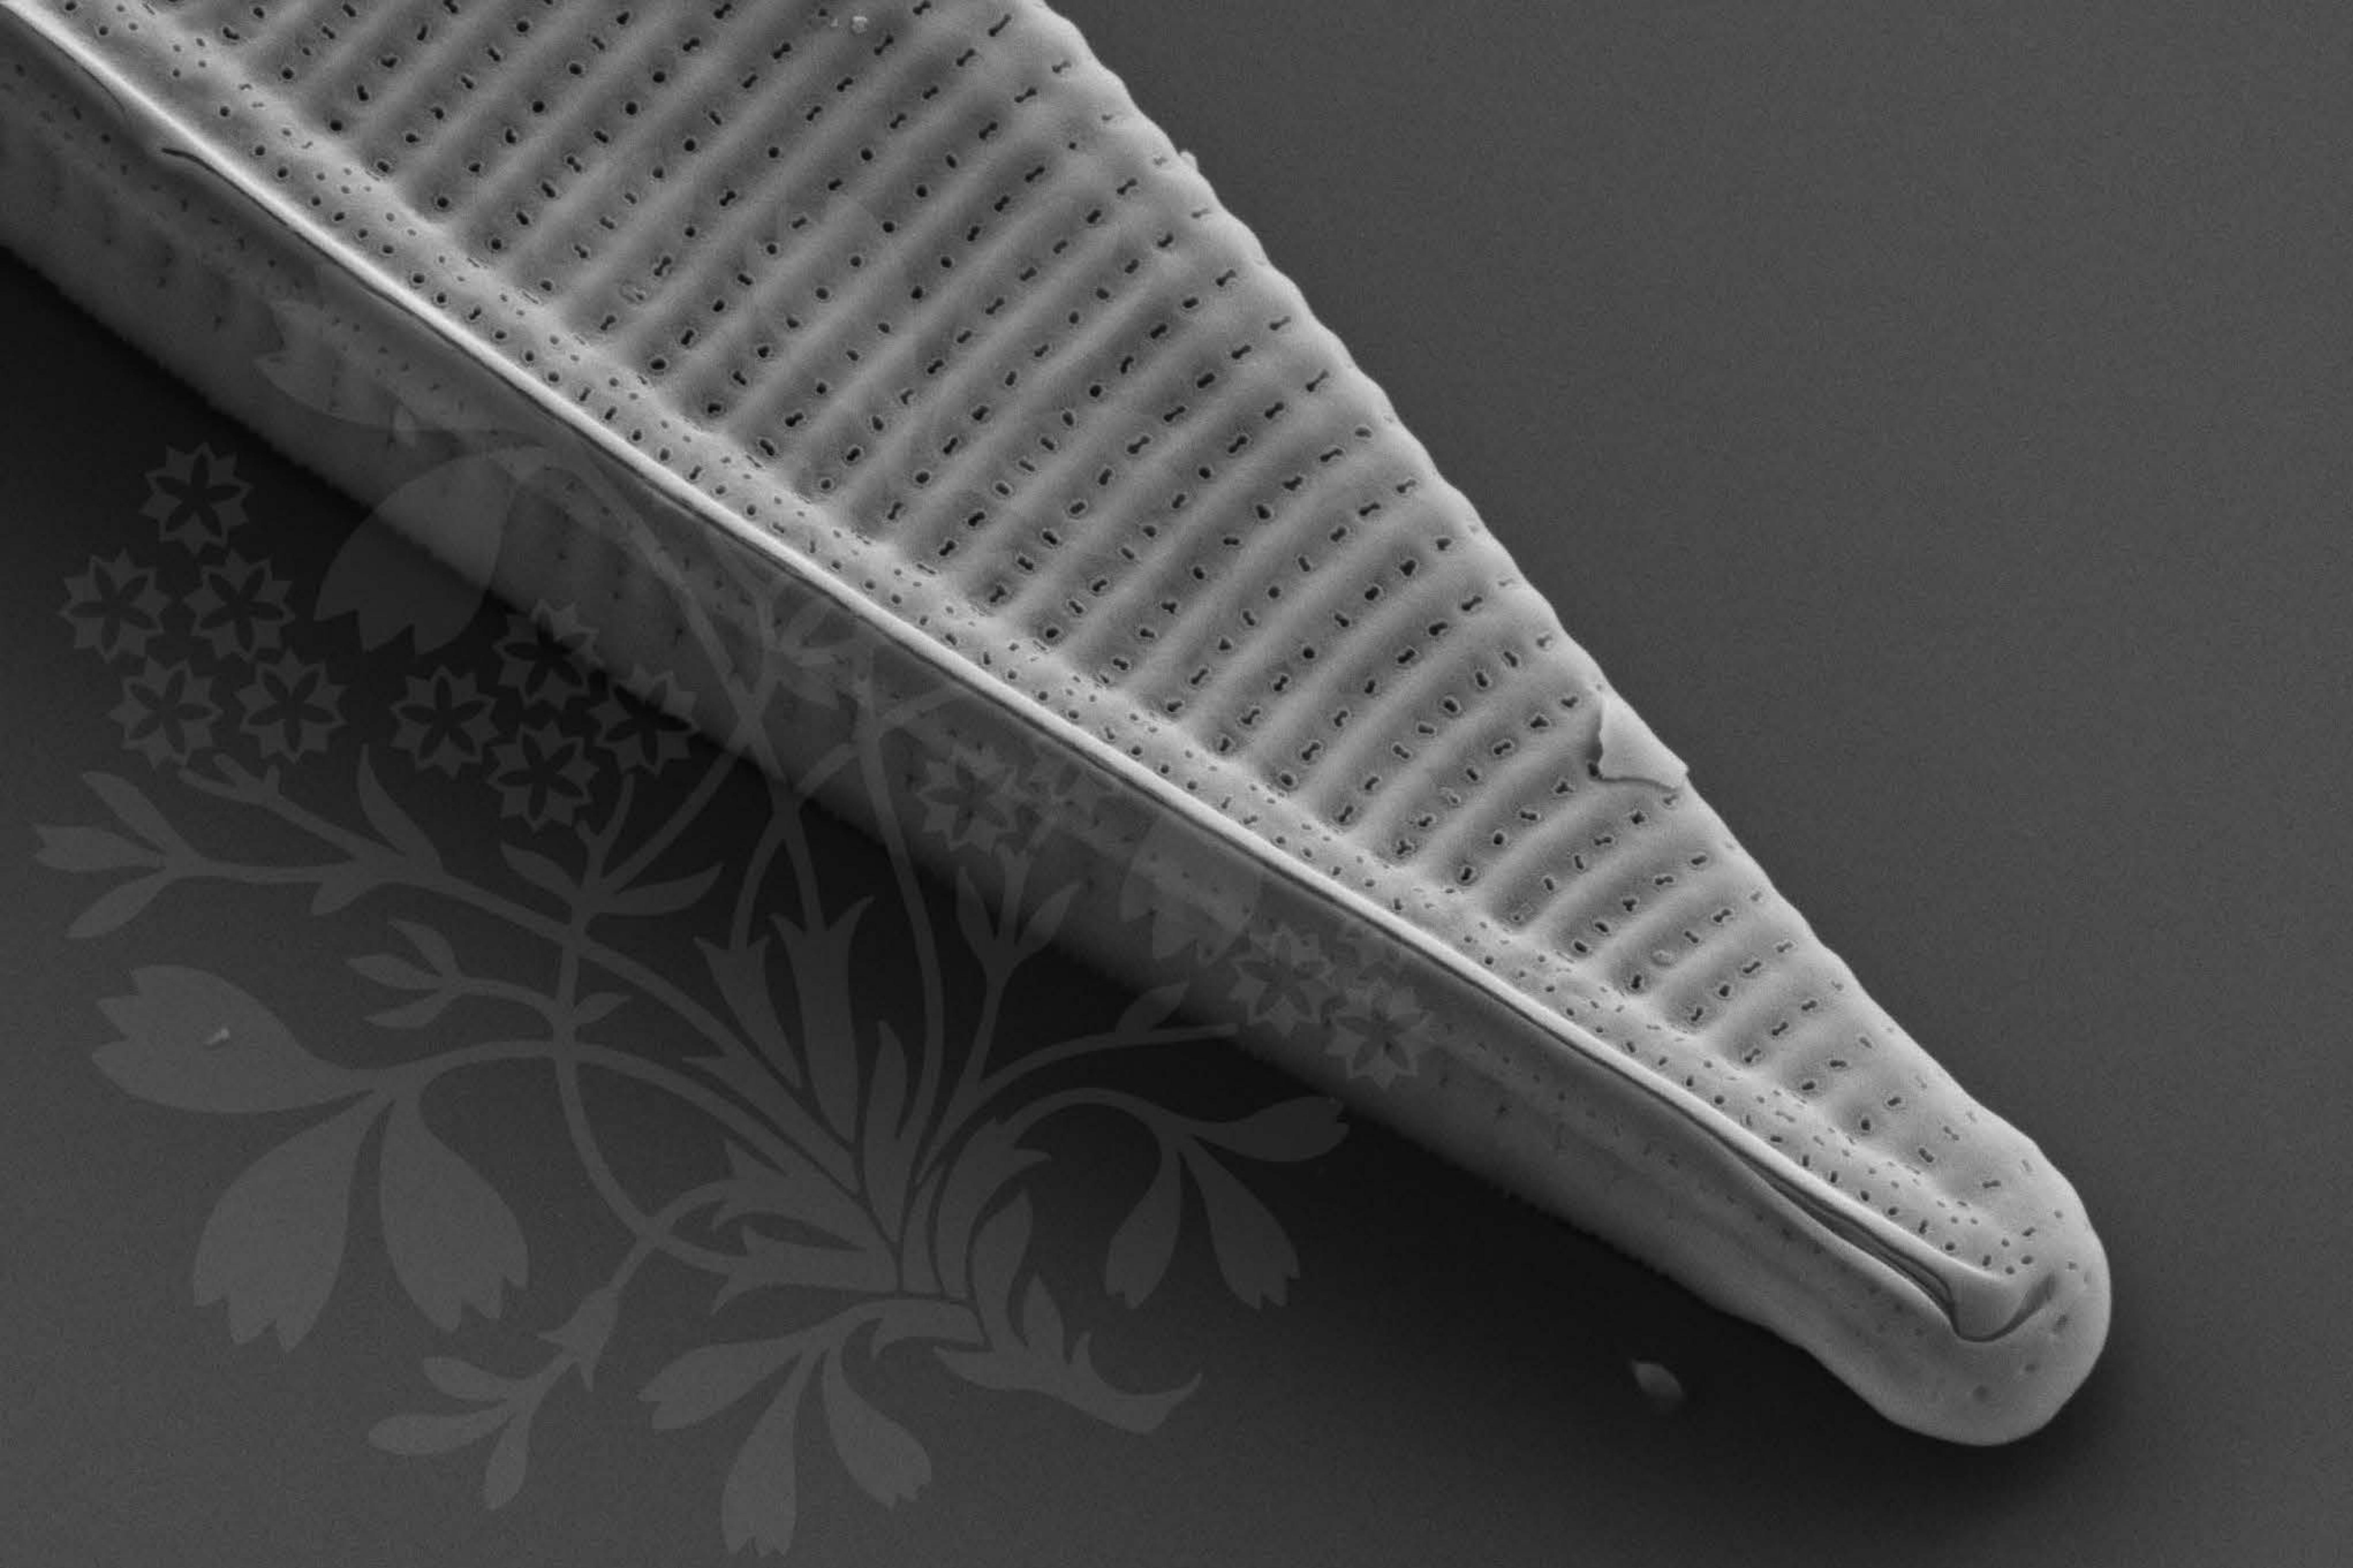

1 μm

100.0 μm

Mag = 20.00 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_16.tif

Store resolution = 2048 * 1536 N = 5
Noise Reduction = Line Avg Scan Speed = 8



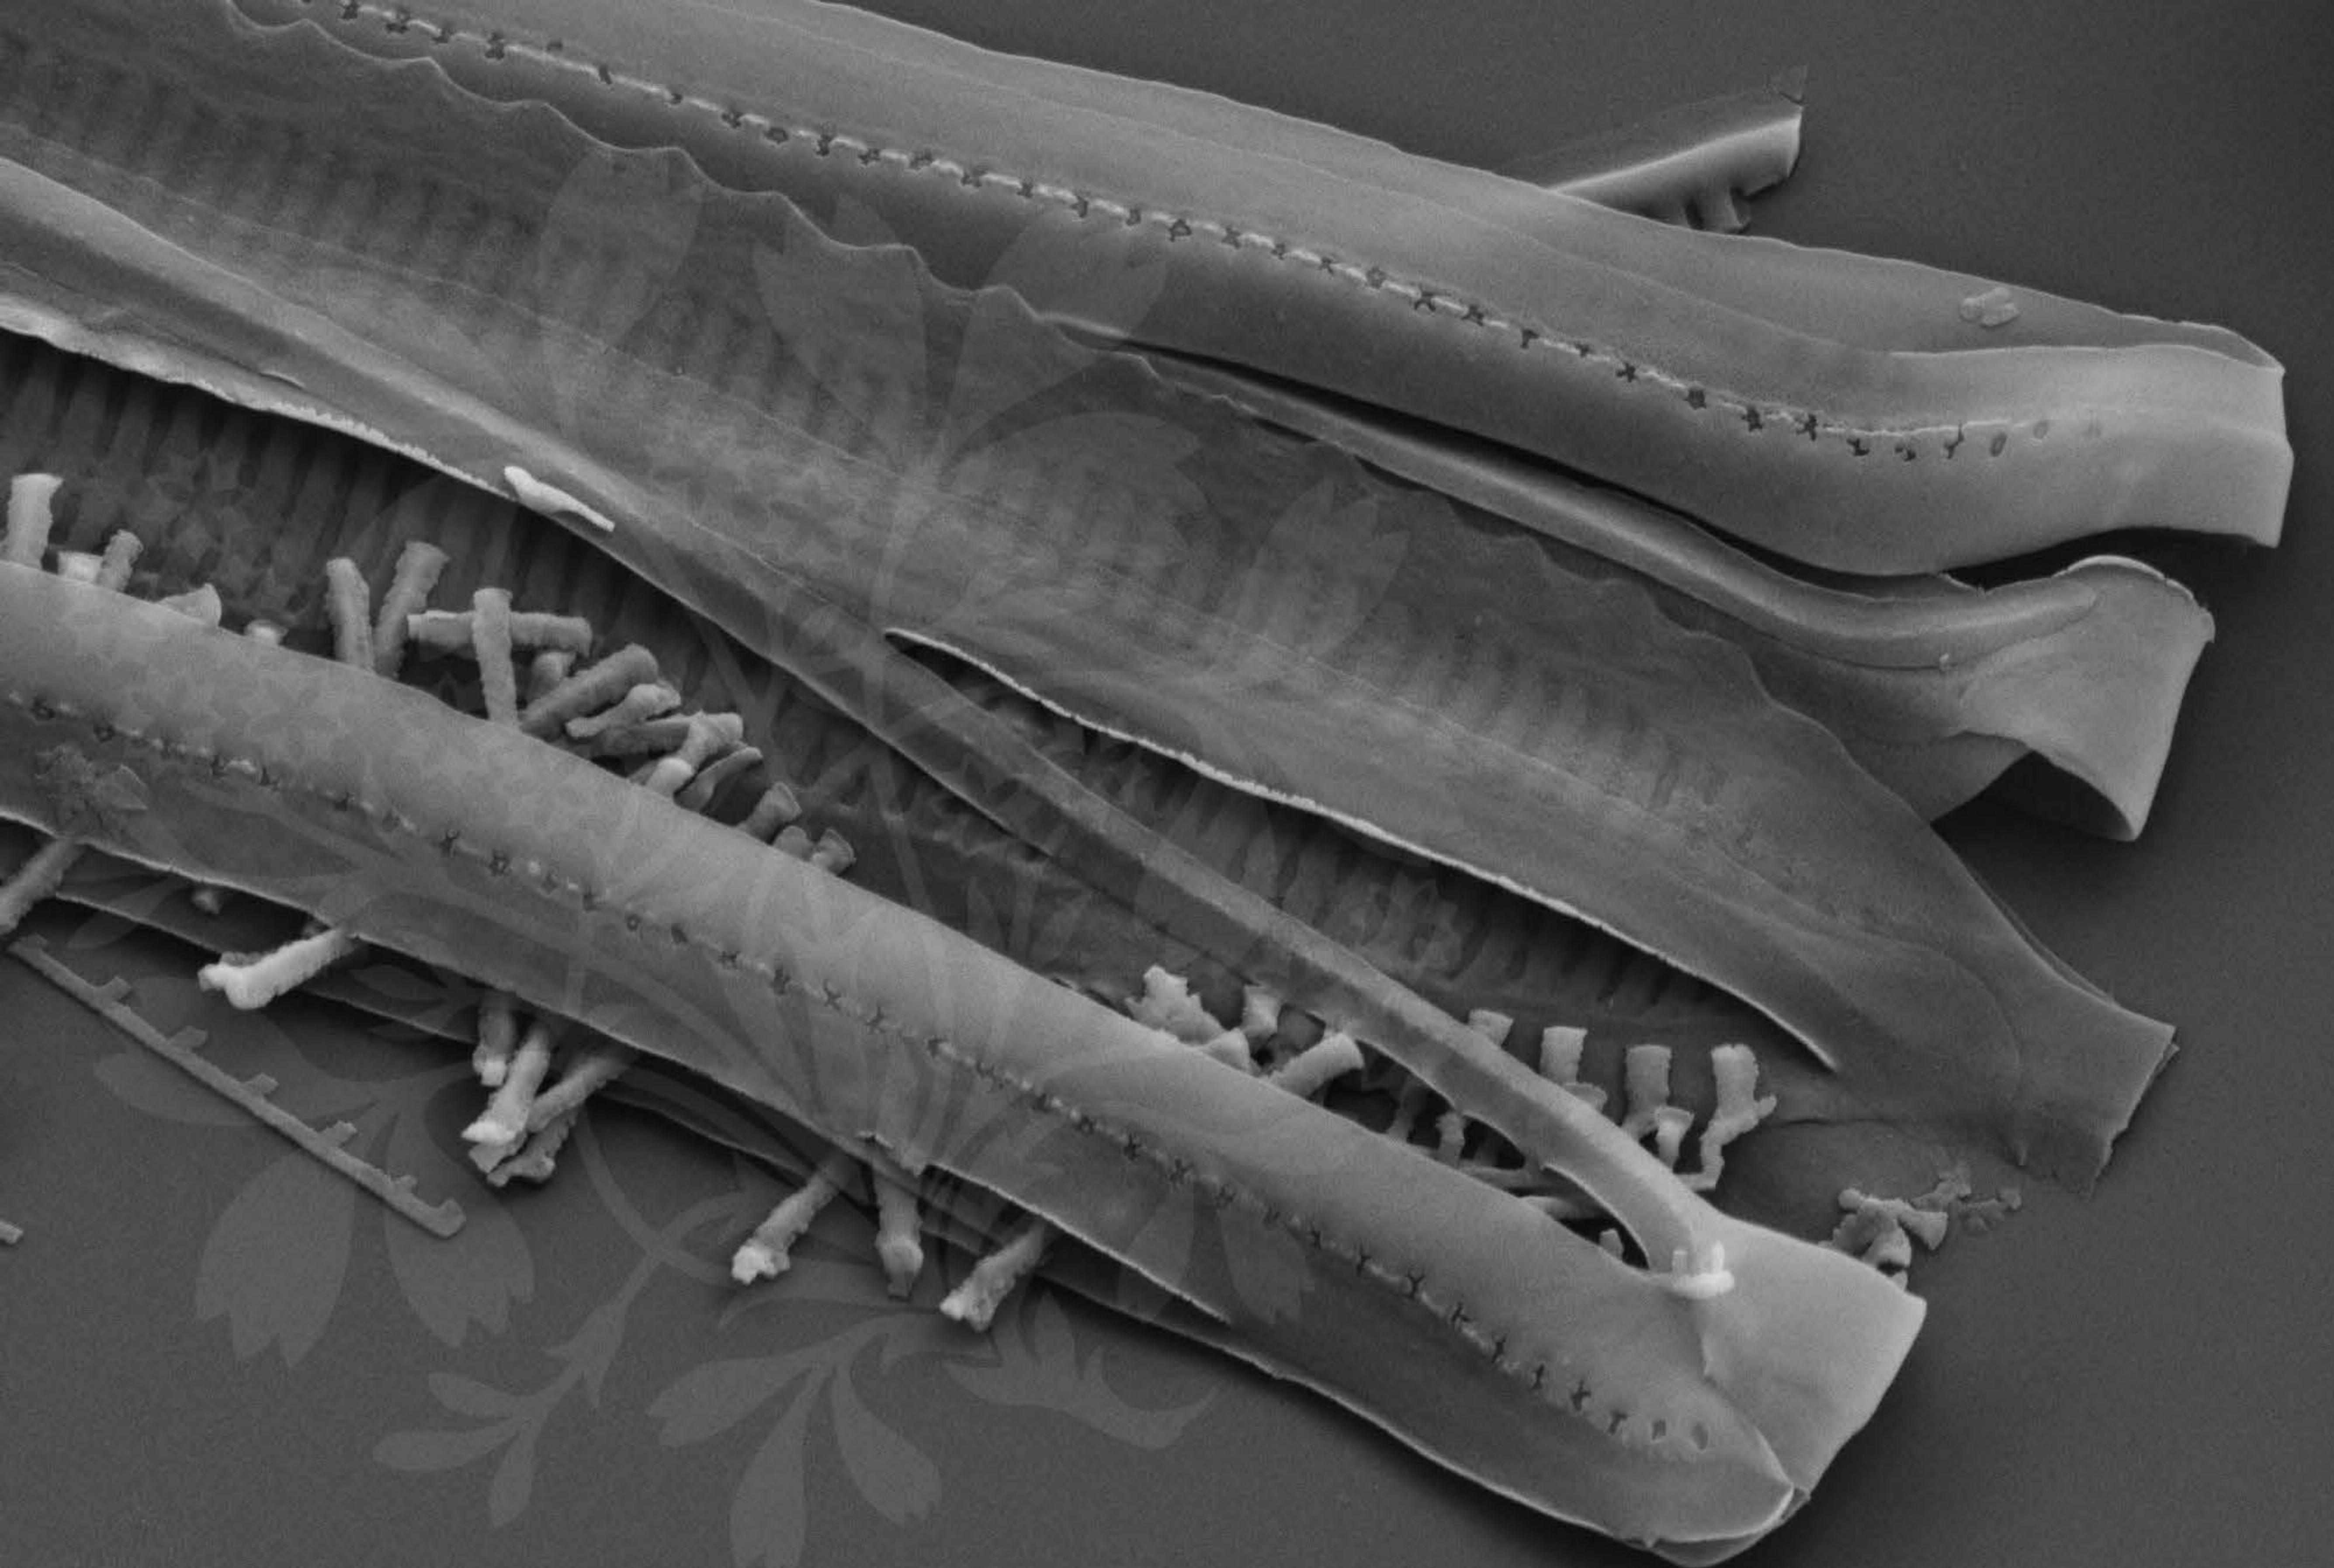

300 nm

Mag = 25.00 K X

EHT = 5.00 kV

Signal A = SE2 Date :23 Feb 2017


100.0 μm

WD = 4.5 mm

File Name = BC0461_17.tif

Store resolution = 2048 * 1536 N = 6
Noise Reduction = Line Avg Scan Speed = 8



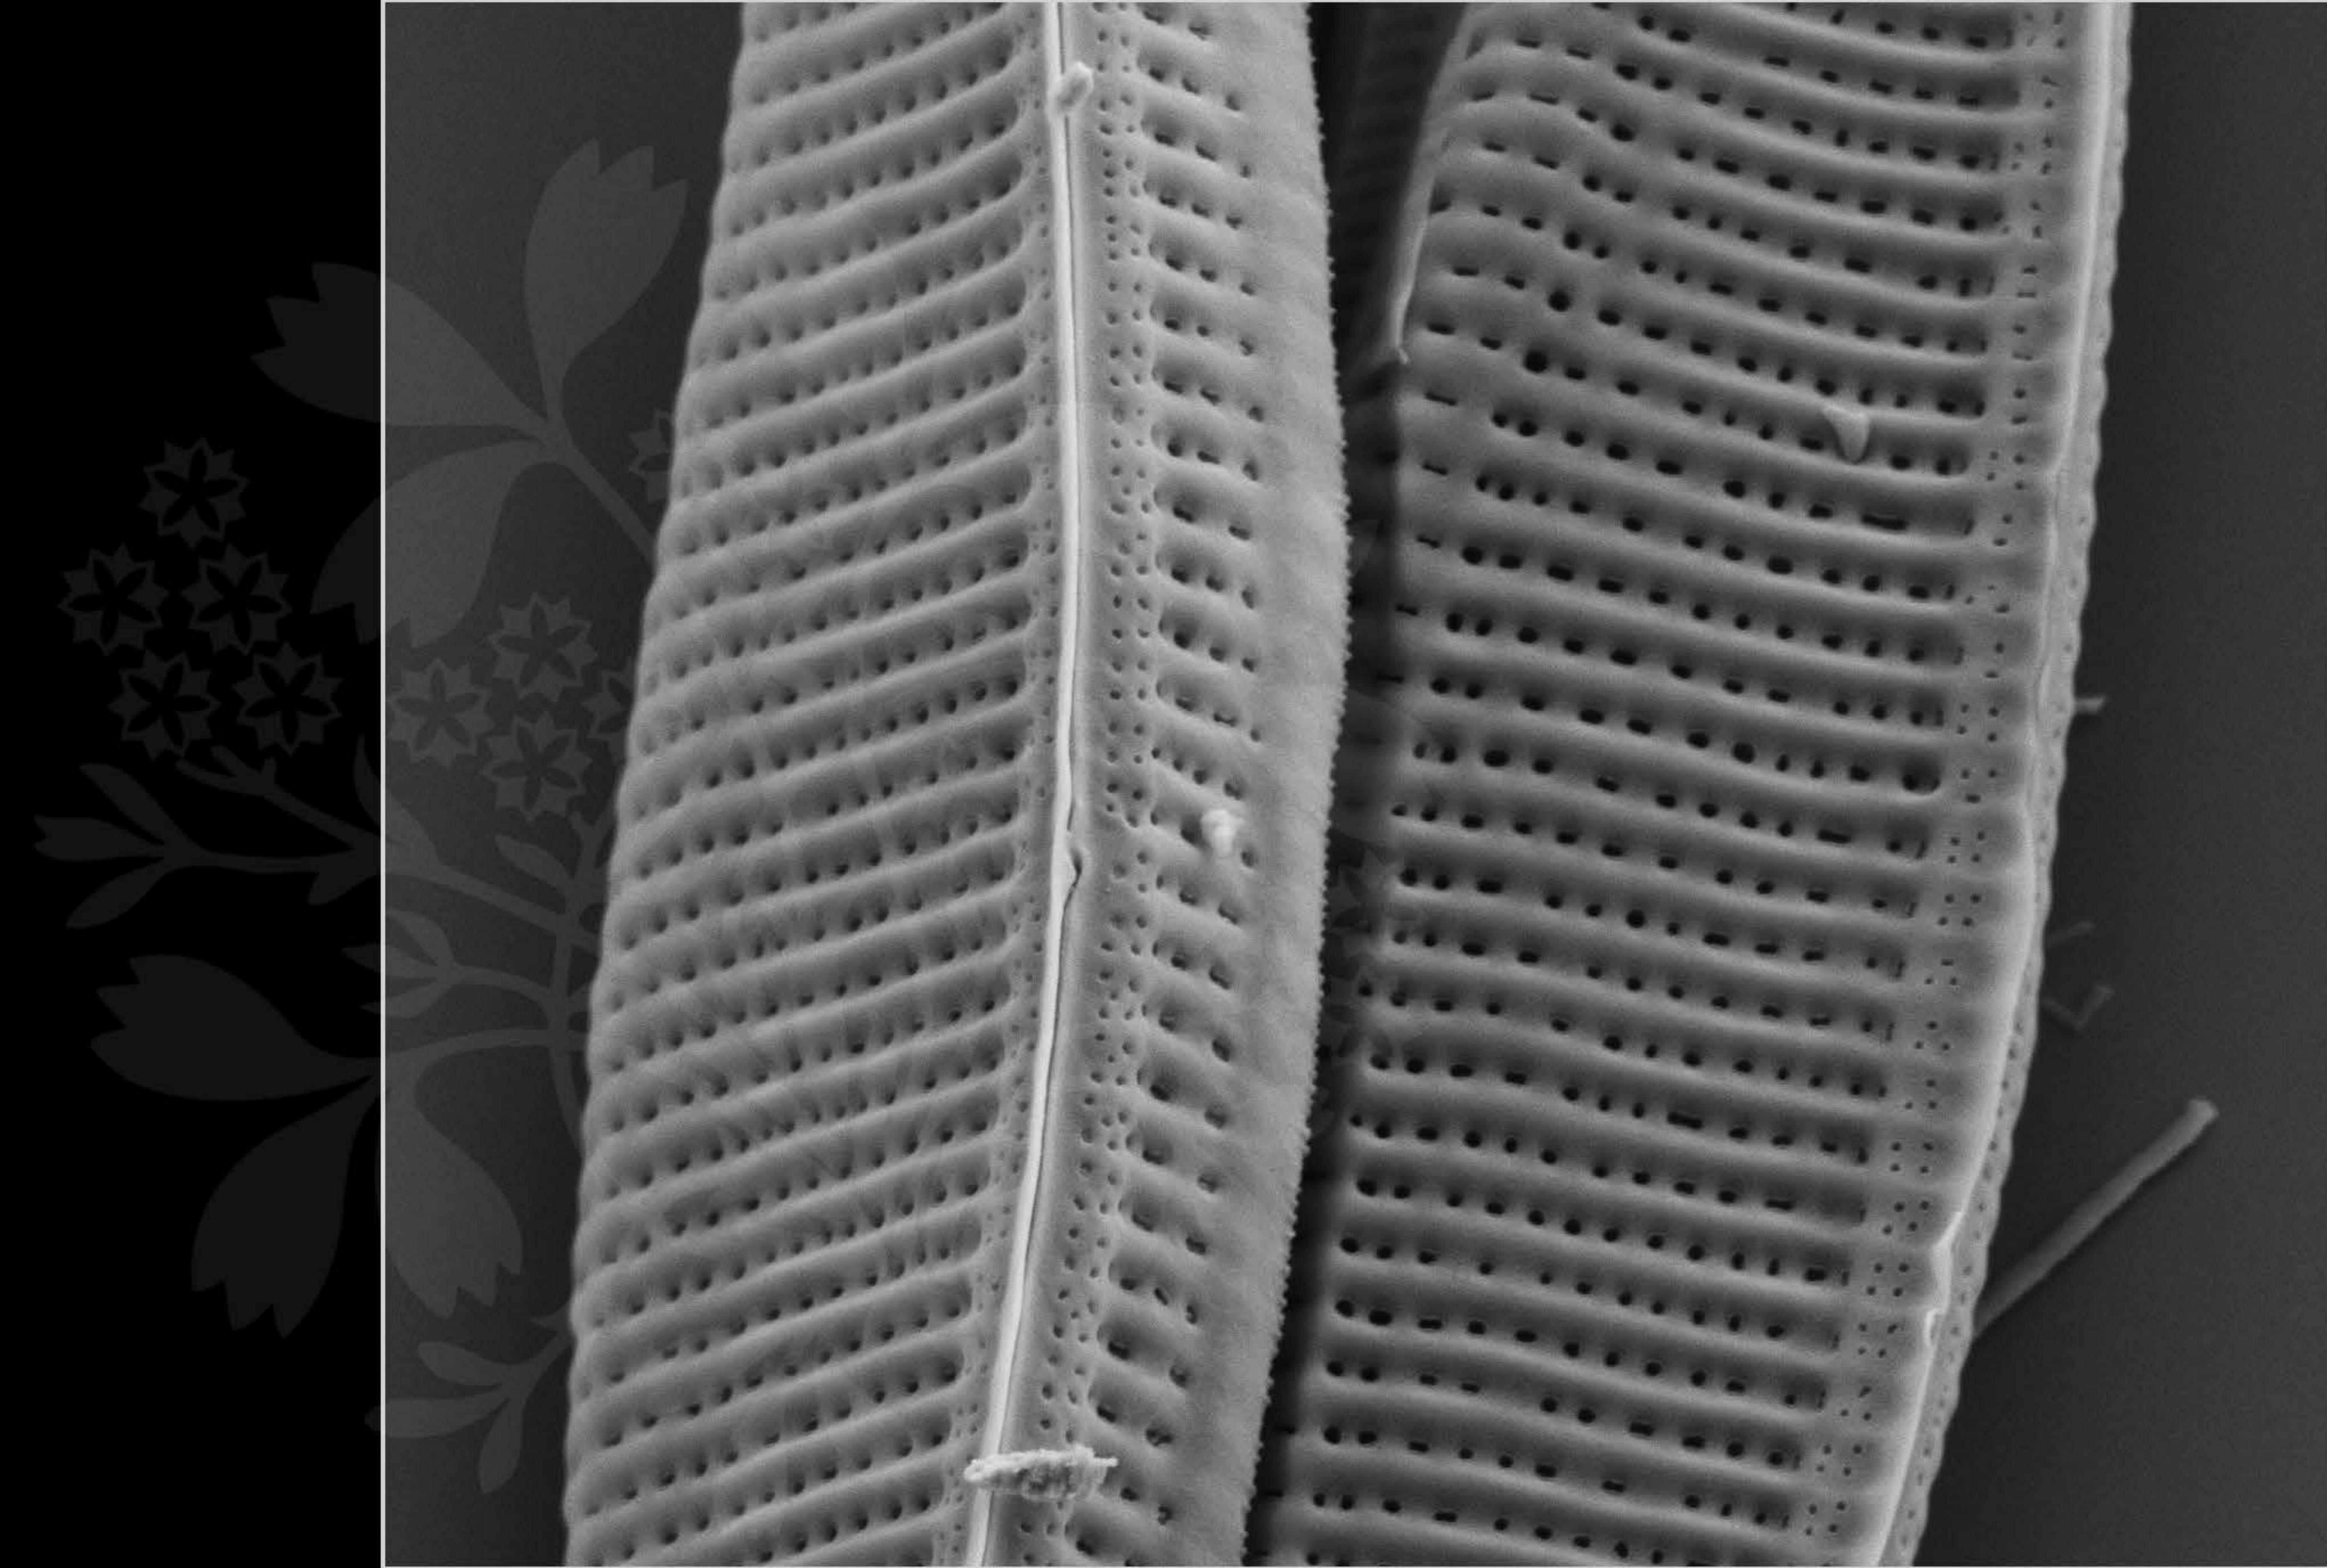

1 μm

100.0 μm

Mag = 20.00 K X

EHT = 5.00 kV

Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_18.tif

Store resolution = 2048 * 1536 N = 5
Noise Reduction = Line Avg Scan Speed = 8





1 μm

100.0 μm

Mag = 9.50 K X

EHT = 5.00 kV


Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_19.tif

Store resolution = 3072 * 2304 N = 5
Noise Reduction = Line Avg Scan Speed = 8



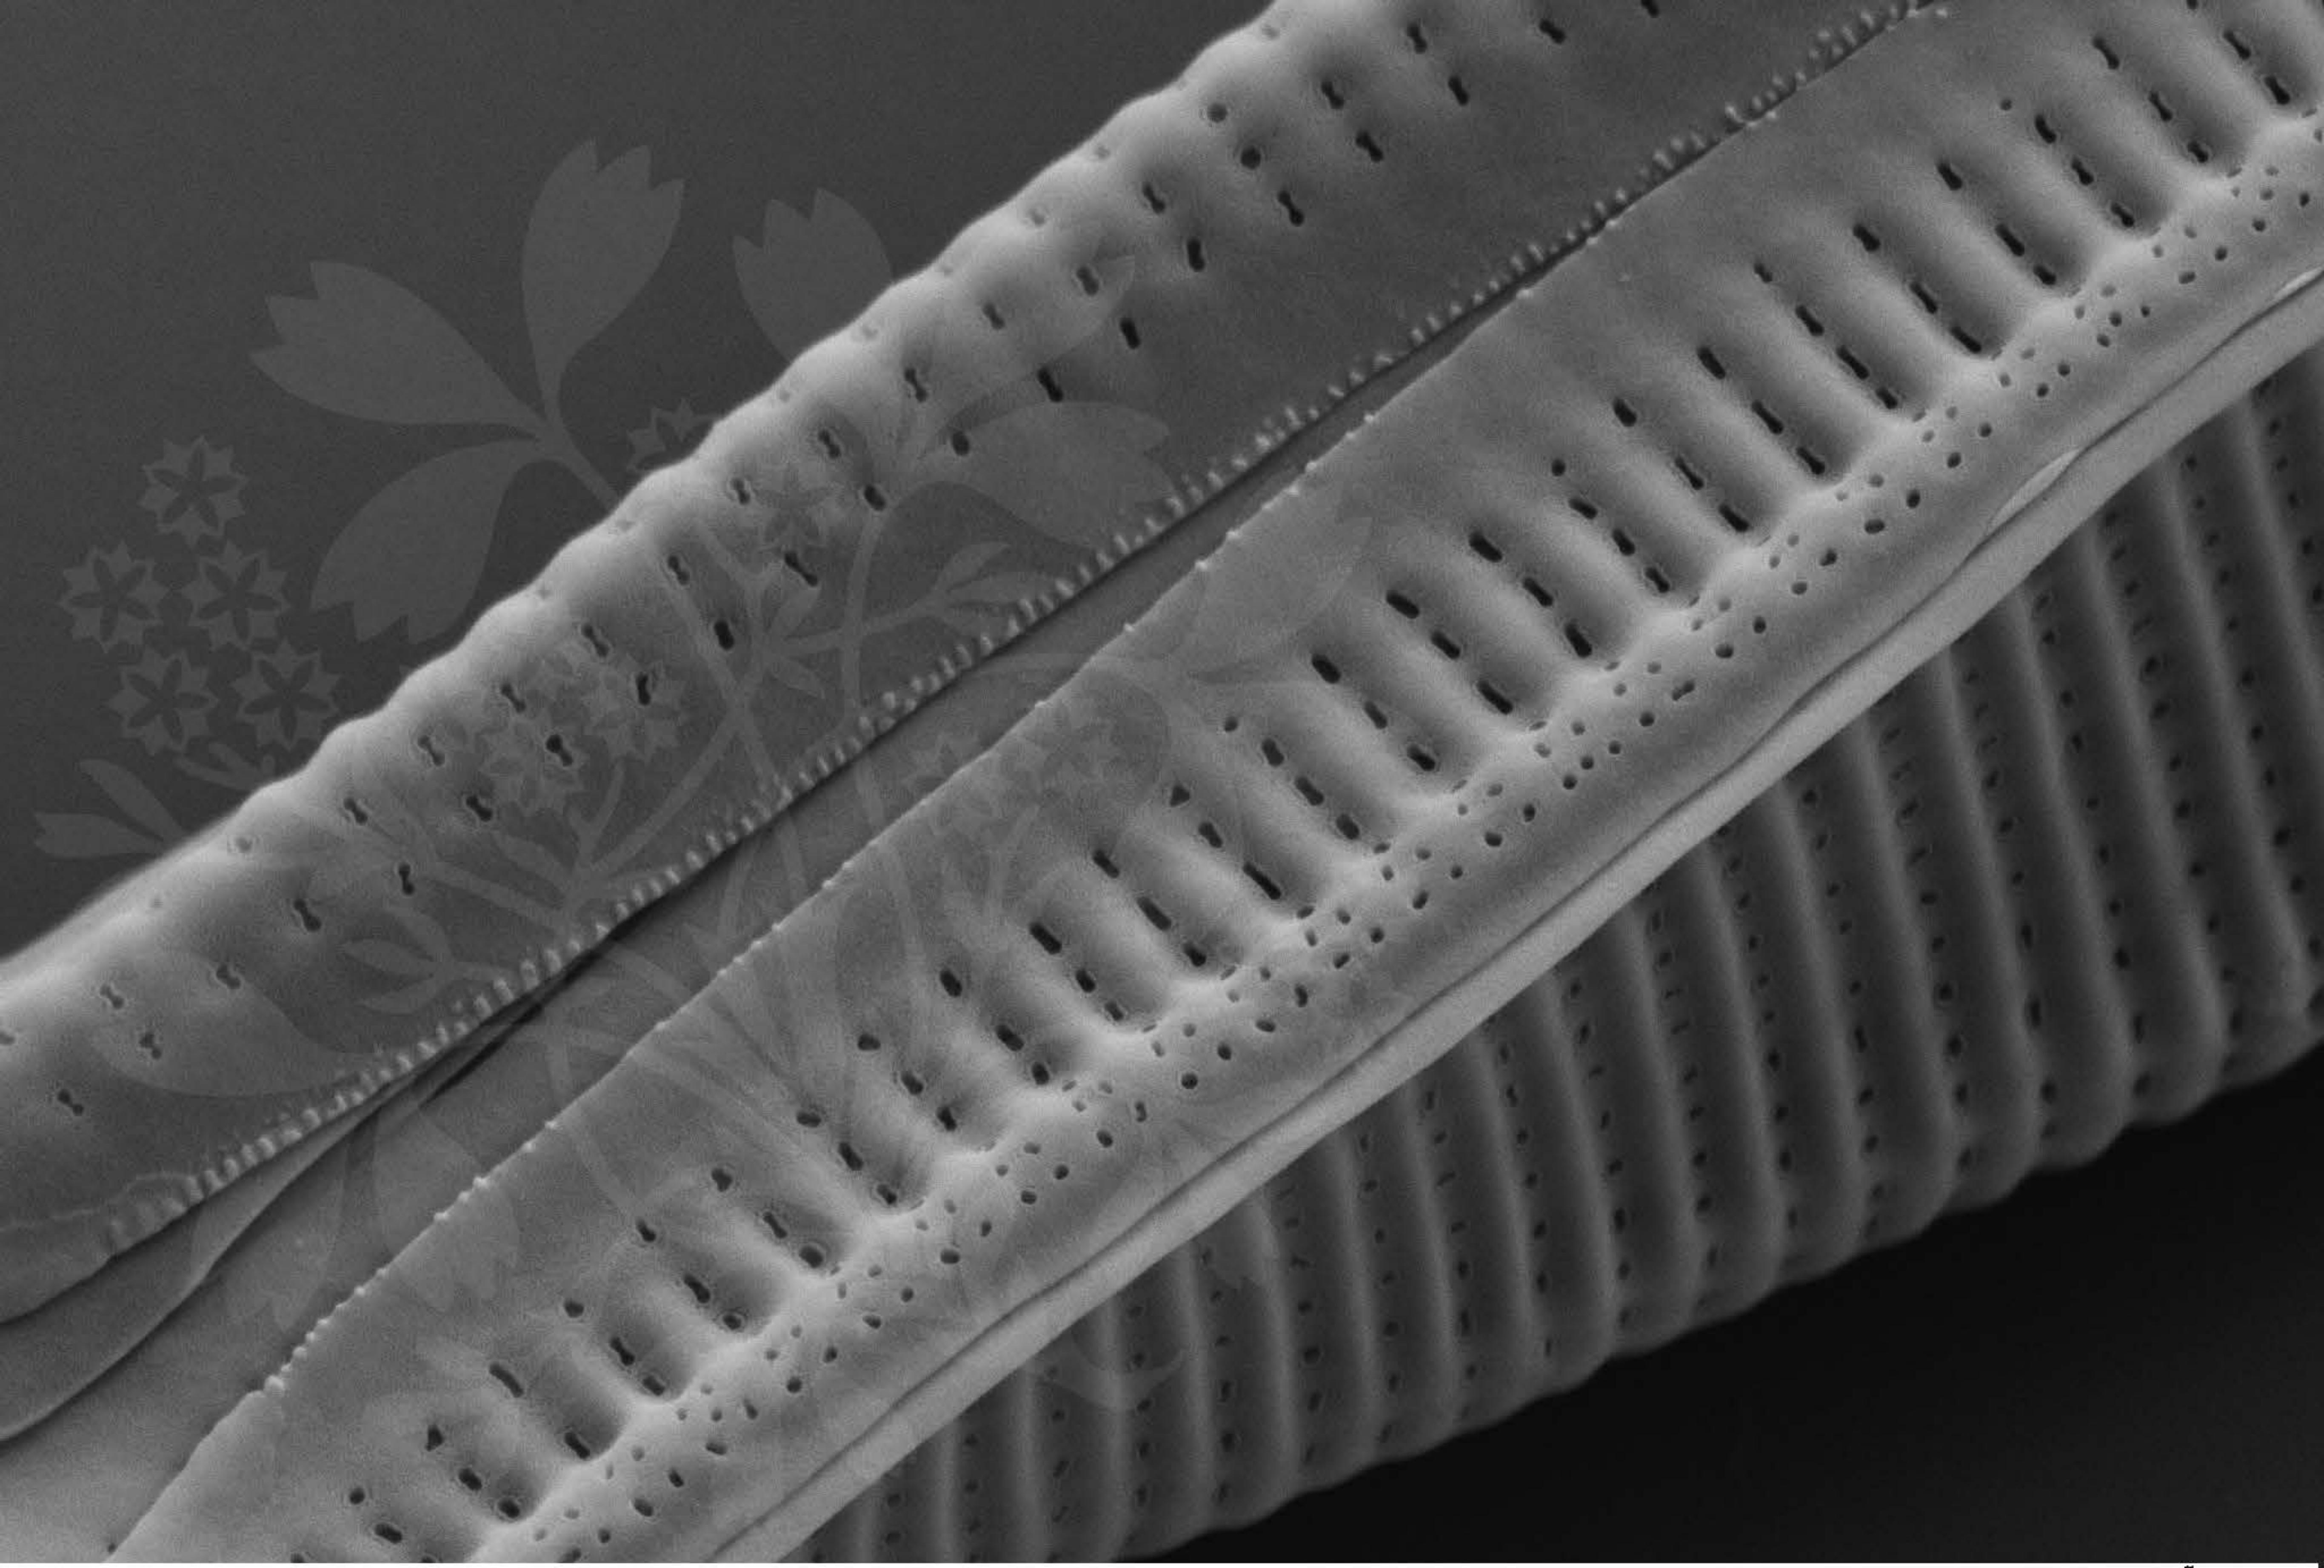

200 nm

100.0 μm

Mag = 30.00 K X

EHT = 5.00 kV

Signal A = SE2 Date :23 Feb 2017

WD = 4.5 mm

File Name = BC0461_20.tif

Store resolution = 2048 * 1536 N = 5
Noise Reduction = Line Avg Scan Speed = 8

